
Manual

DIAZ | SUNPROTECTION

Kingsize - Somfy motor for switch control

Connect the motor to the electricity

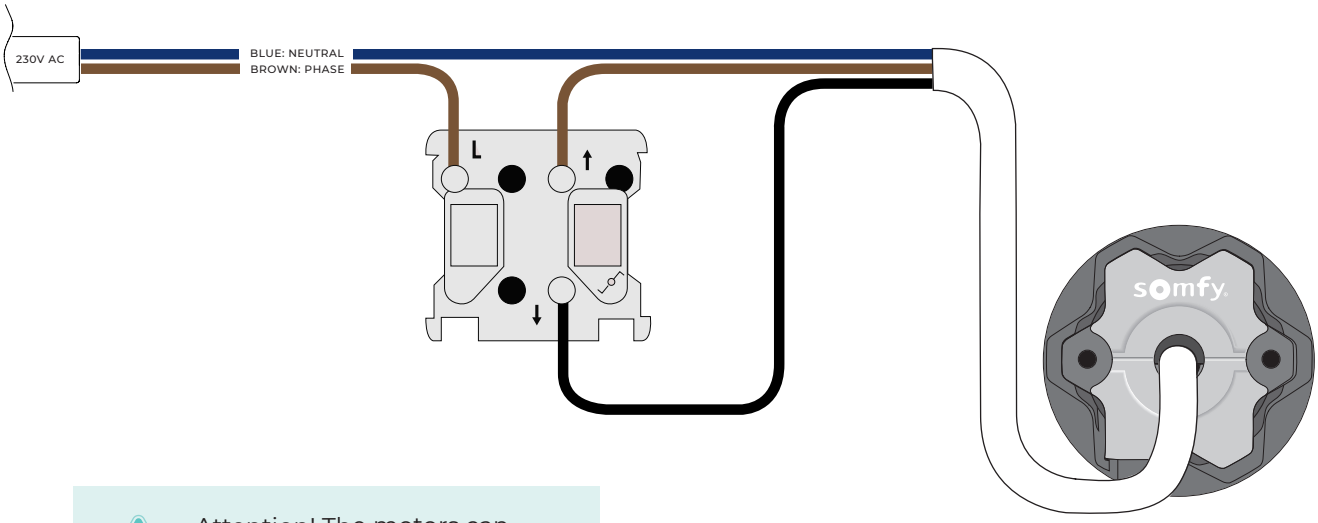

Attention! The motors can not be parallel connected.


Installation of the rolling direction


1. Bring the switch in position “stop” and remove the yellow protective cap from the tubular motor.
2. Press the lower button of the switch.
3. Does the roller blind go down? The direction is installed correctly.
4. Does the roller blind go up? You need to change the rolling direction. Swap the brown and black wire of the motor at the back of the switch.

Attention! Make sure no buttons are pushed while switching the wires.


Installation of the end limits

1 Determine which button to press to set the end limits.

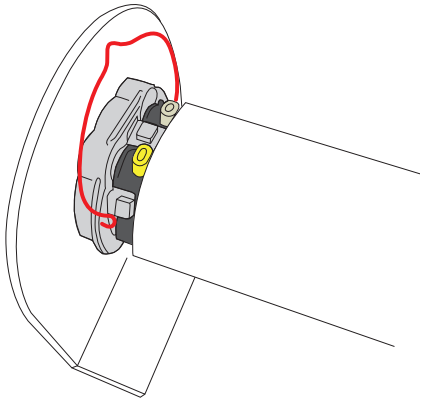

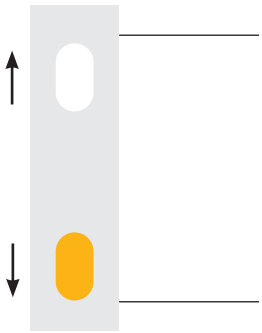

motor left:
white button = bottom position
yellow button = top position

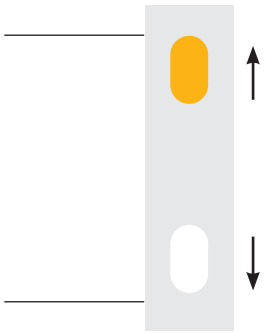

motor right:
white button = top position
yellow button = bottom position

Attention! If the roller blind has a contra-rolling direction,the function of the adjustment bolts is reversed.

2 Installing the bottom limit

2.1 Push the correct button on the motor 1 x to open the bottom limit programmation.

2.2 Pull the roller blind on the desired bottom limit with the up/down button of the switch.

2.3 Push the same button again to confirm this programmation.

3 Installing the top limit

3.1 Push the correct button on the motor 1x to open the top limit programmation.

3.2 Pull the roller blind on the desired top limit with the up/down button of the switch.

3.3 Push the same button again to confirm this programmation.