
Manual

VH1/VH2/VH3

DIAZ | SUNPROTECTION

Placement of the clips on the profile

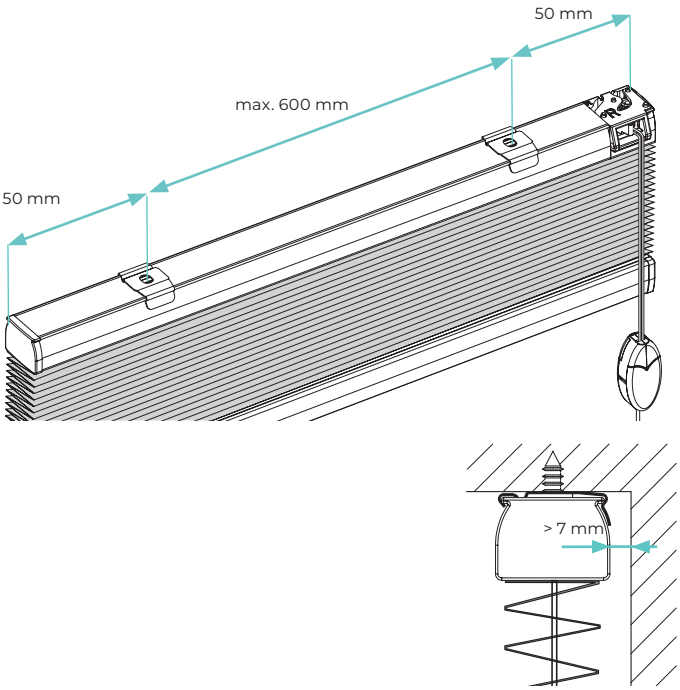



Mount the clips 50 mm respectively from the end of the headrail, and with a distance of max. 600 mm.

It is recommended to mount the clip with the flap forward (into the room). The clip can only be mounted with the flap toward the window or the pane respectively, in case the distance to the rail is min. 7mm.


Mounting of the pleated blind on the ceiling

1 Mount the clips on the ceiling with a screw

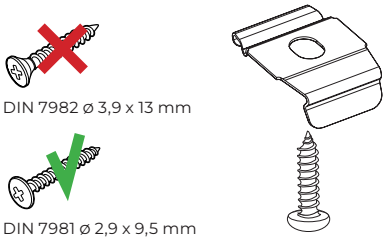

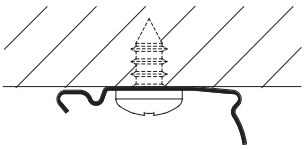

2 Place the profile in the back edge of the clip and push the front of the profile upwards (untill it clicks).

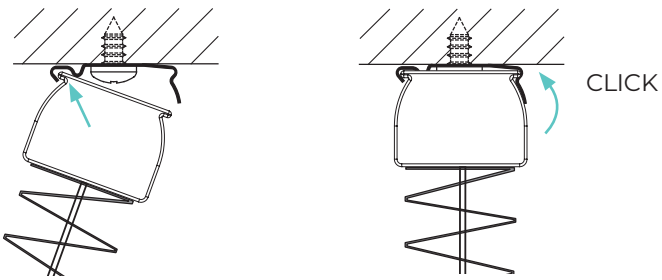

Mounting of the pleated blind on the wall


1 Mount the bracket on the wall and attach the clip.



DIN 7982 ø 3,9 x 13 mm




DIN 7981 ø 2,9 x 9,5 mm

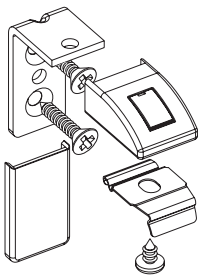





i Alternative mounting



2 Place the profile in the back edge of the clip and push the front of the profile upwards (untill it clicks).

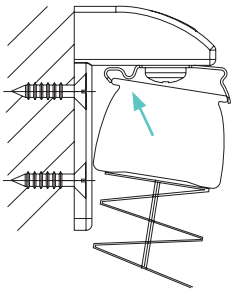

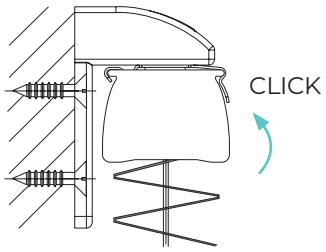

Mounting of the pleated blind with glazing bead support


1 Install the glazing bead support with moulding locking strip and attach the clip.




DIN 7982 ø 3,9 x 13 mm





DIN 7981 ø 2,9 x 9,5 mm

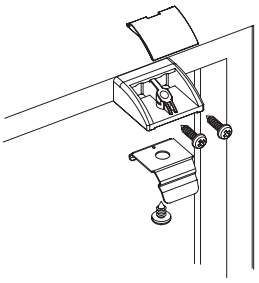

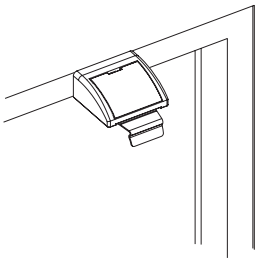


2 Place the profile in the back edge of the clip and push the front of the profile upwards (untill it clicks).

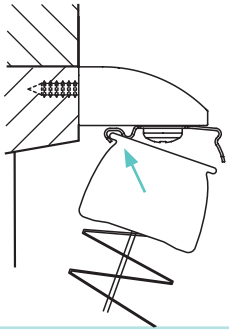

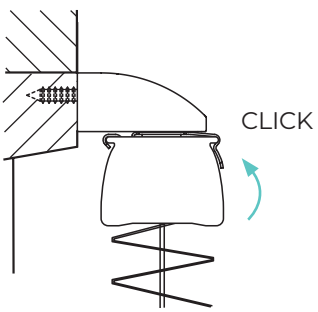


Mounting the pleated blind with block holder

1 Install the block holder and attach the clip.

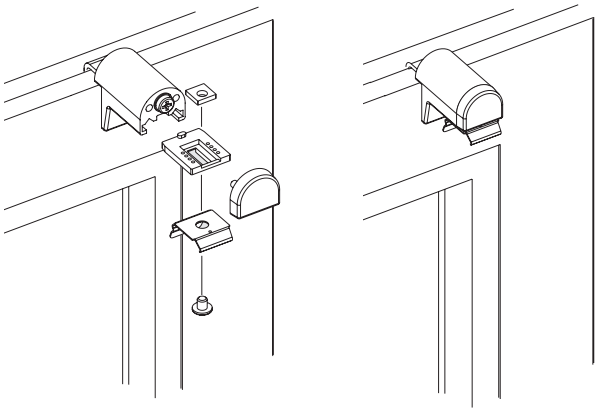


2 Place the profile in the back edge of the clip and push the front of the profile upwards (untill it clicks).

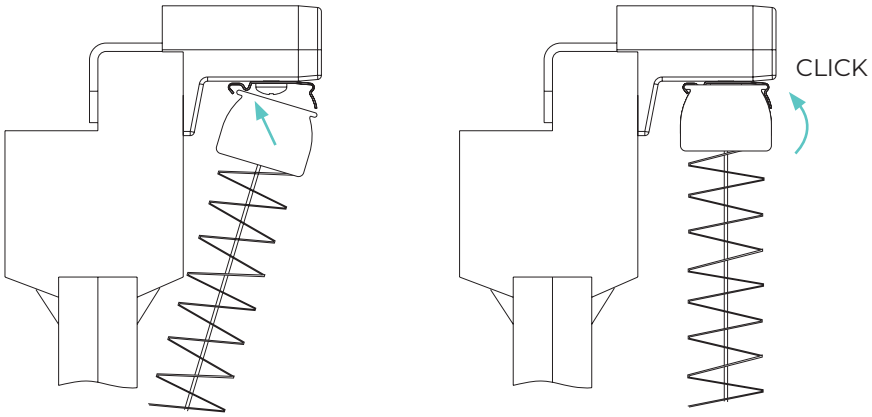


Mounting of tension cord bracket


1 Let down the blind and mark the position for the clamping shoe.

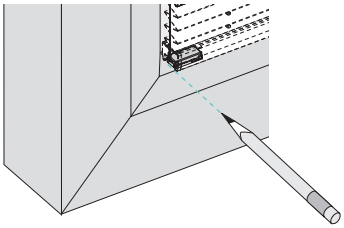


You can also use the fixing template (green) to mark the position. (see seperate sheet)




2 Screw on holding brackets, mounting bracket, glazing bead support or block holder




holding brackets

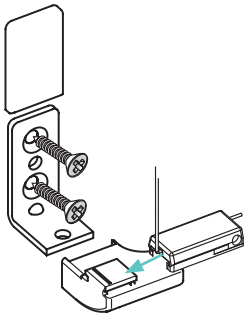

wall support




glazing bead support

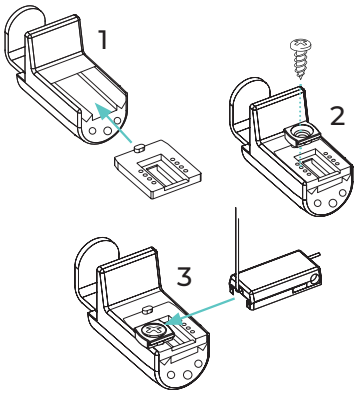


block holder

3 Check the operation of the blind.

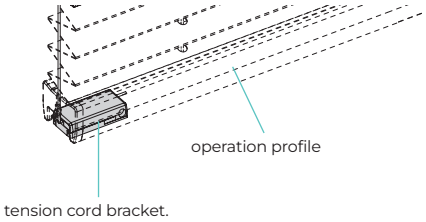


4 Cut off the excess cord ends




Adjustment of the cord tension must be uniform and may only be made by a professional.

Child safety

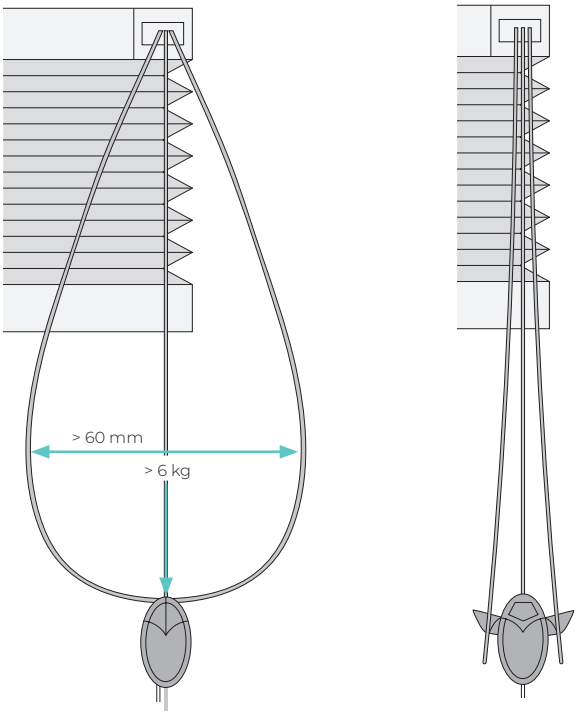

A release mechanism triggers the opening of the safety elements when a load (6 kg or more) or a width (60 mm or more) is applied to the cord loop.

Assembly of the child safety mechanism

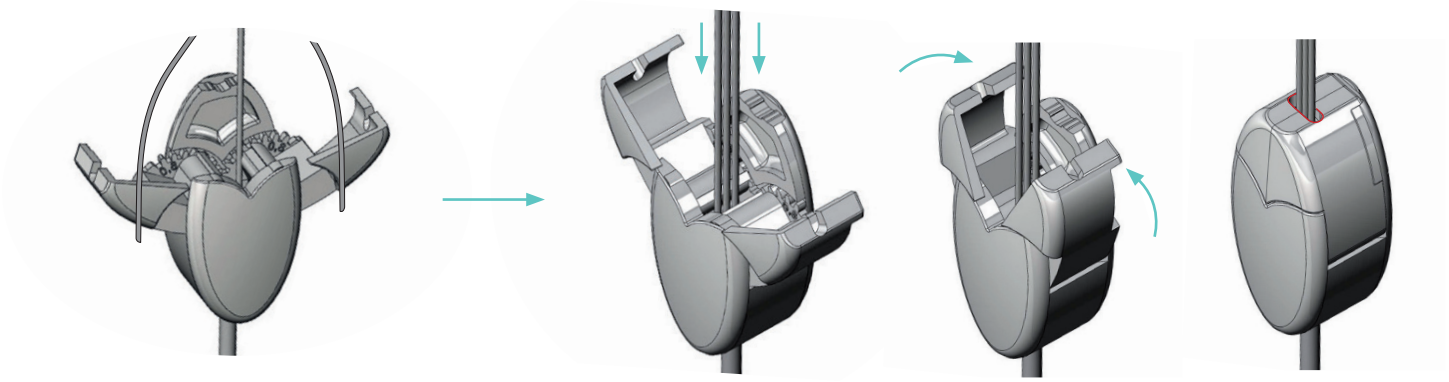

You can only reassemble the mechanism when the pleated blind is raised. Ensure that the cords are neatly aligned before closing the mechanism again.