Manual


DIAZ | SUNPROTECTION


Diaz B.I. battery motor with integrated battery

Orient the slats using the motor and open and close the slats using the control cord.

Scan code for video manual

Introduction

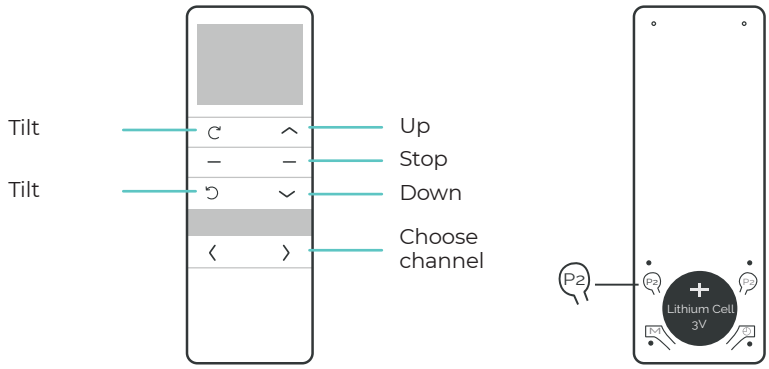

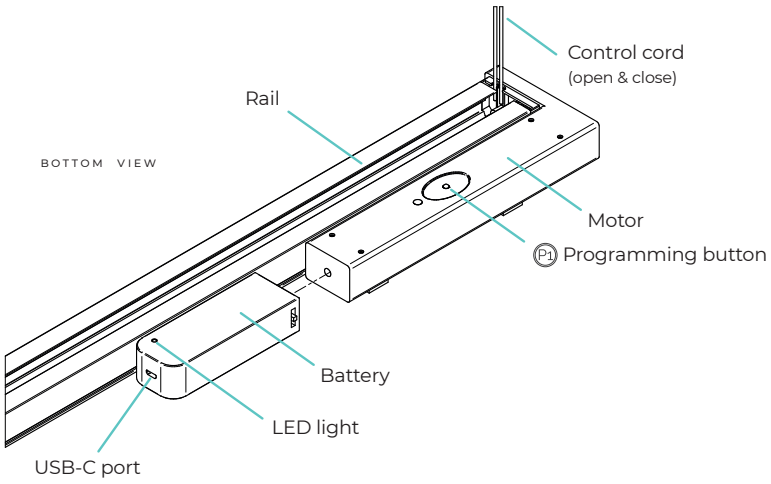


If your motor does not respond as described in this manual, please proceed to troubleshooting (pg 3).

Before first usage, please fully charge the battery motor.




Orientation of the slats

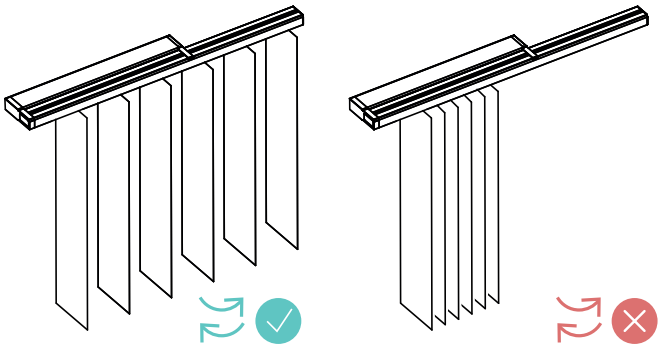

Only orientate the slats when they are in open position in front of the window. Never orientate the slats when they are in closed position (in package).

Quick start guide

1 Pair the first remote

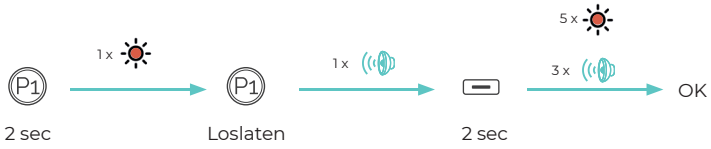

Always choose the right channel before pairing or copying a remote/channel.


Attention! Pair the remote within 10 sec after operating P1.

To delete a connected channel, repeat the steps above.

Optional


1 Adjust upper- and lower limit

1.1 Upper limit

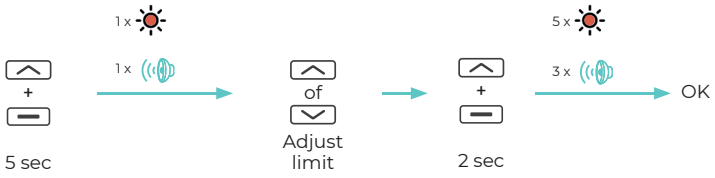


Warning! Risk of damage. Stop the blind in time.

1.2 Lower limit

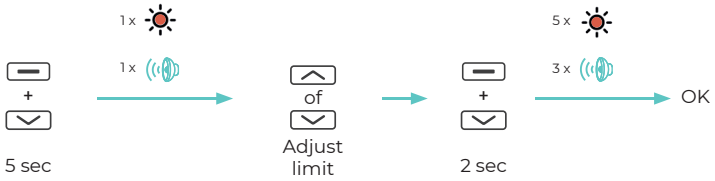


2 Pair/remove additional remote/channel



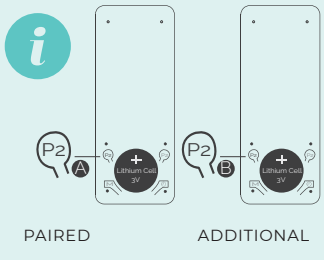


3 Favorite position ★

3.1 Set-up

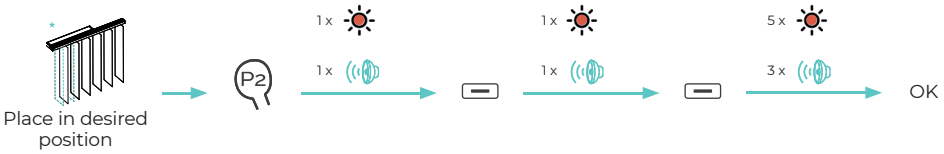


3.2 Go to favorite position



Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

1 Factory reset

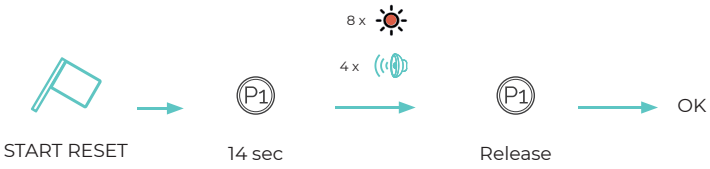

Warning! move the blind away from the upper- and lower limit before the reset.

2 Pair the first remote.

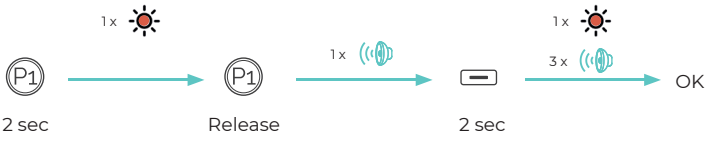

Always choose the right channel before pairing or copying a remote/channel.

Attention! Pair the remote within 10 sec after operating P1.

3 Check rotational direction




Alternative method



4 Setting end positions

Warning!
Risk of damage.
Stop the blind
in time.


4.1 Orientation clockwise

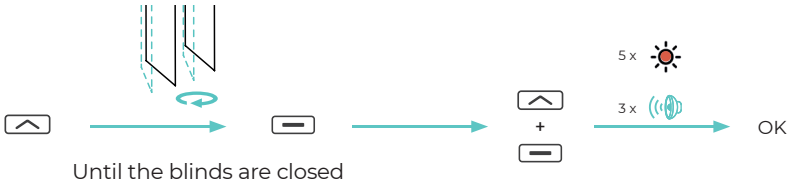

Until the blinds are closed

Do not turn too far

4.2 Orientation counterclockwise

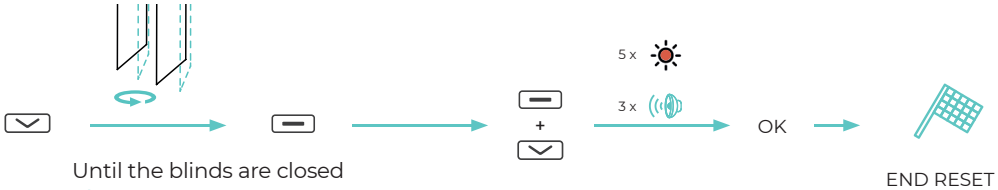

Until the blinds are closed

Do not turn too far

END RESET