
Manual

DIAZ | SUNPROTECTION

Diaz potential-free motor for pleated blinds

Introduction

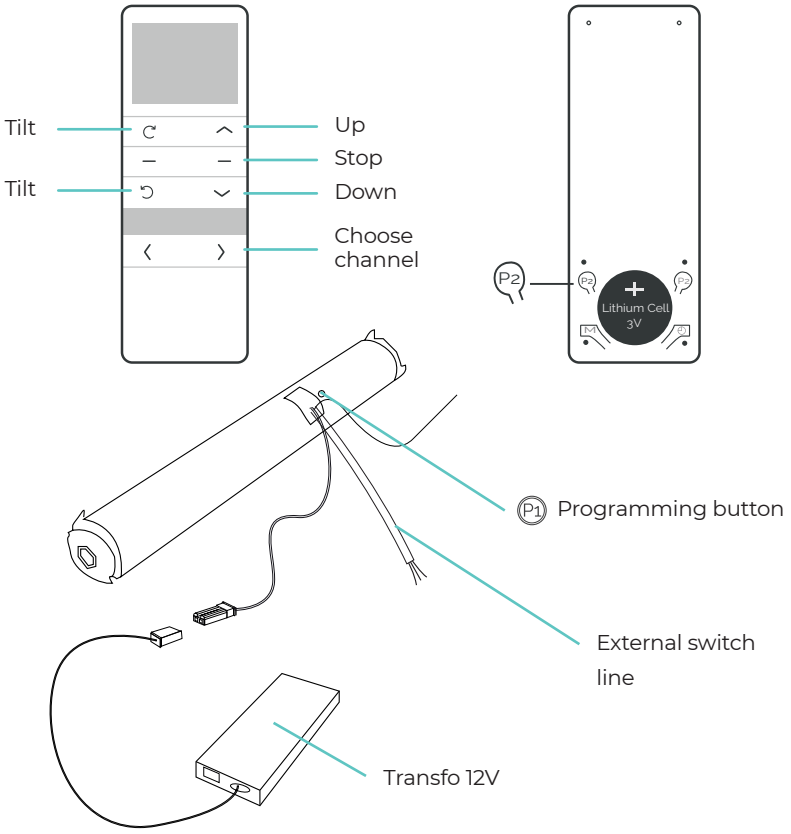

If your motor does not respond as described in this manual, please proceed to troubleshooting (pg 3).


Dimensions transfo:
13 cm x 5 cm
thickness 1,5 cm

A transmitter is required to adjust the end points.

Quick start guide

1 Connecting the power


Common line (Com) = Red cable
Up line (Up) = Black cable
Down line (Down) = Green cable

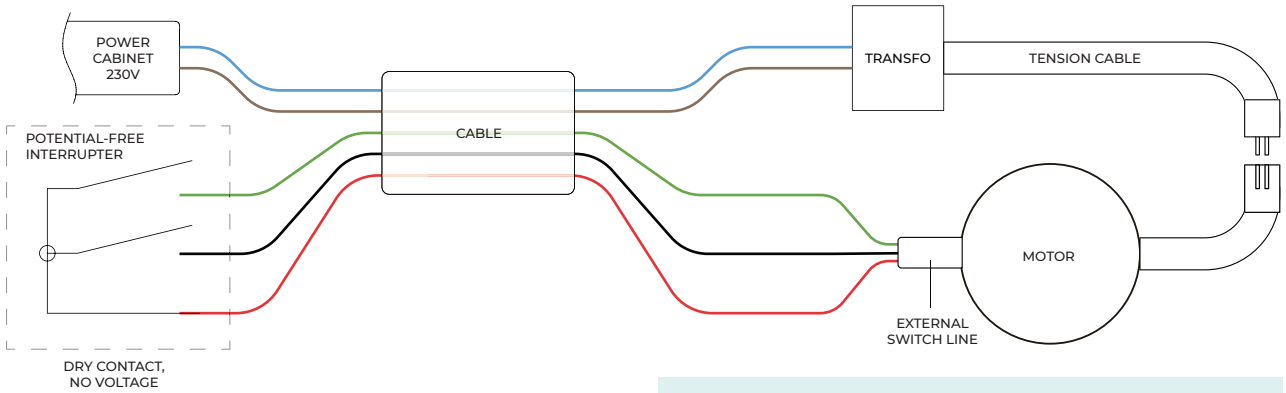

Attention! Do not connect multiple motors simultaneously, but one by one.

Optional

1 Pair the first remote

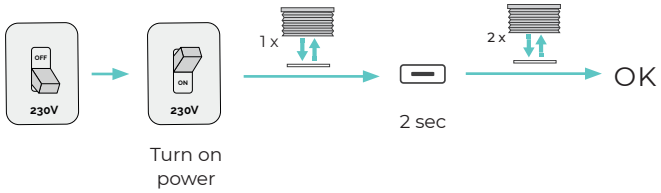

Attention! Pair the remote within 10 sec after turning on the power/operating P1.


Alternative method




Always choose the right channel before pairing or copying a remote/channel.

2 Set-up upper- and lower limit

2.1 Upper limit

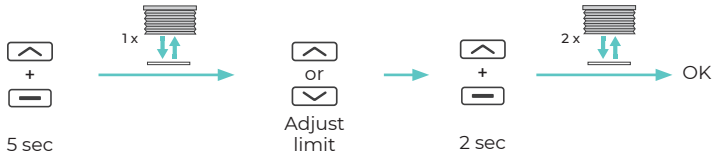


2.2 Under limit

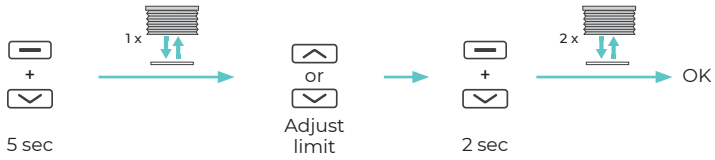


3 Favorite position ★

3.1 Set-up




3.2 Go to favorite position



Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

1 Factory reset

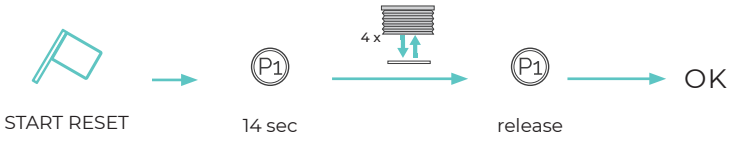

Warning! move the blind away from the upper- and lower limit before the reset.

2 Pair the first remote.

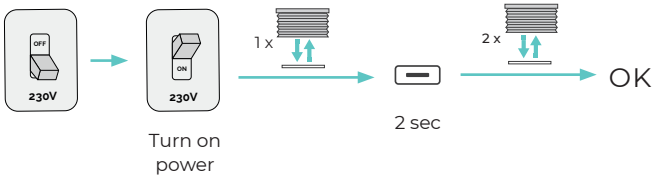


Attention! Pair the remote withing 10 sec after turning on the power/ operation P1.

Alternative method



Always choose the right channel before pairing or copying a remote/channel.

3 Check rotational direction

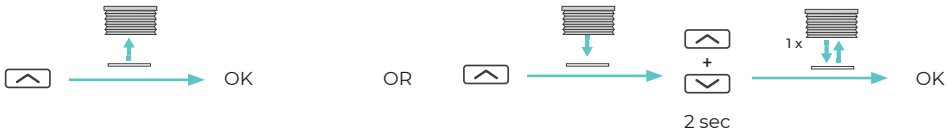


Alternative method



4 Set-up upper- and lower limit

4.1 Upper limit

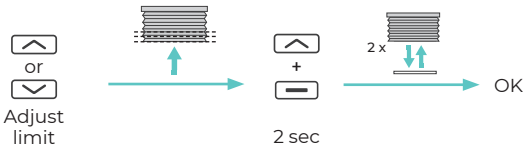

Warning!
Risk of damage. Stop the blind in time.

4.2 Lower limit

