
Manual


DIAZ | SUNPROTECTION

Motion Bluetooth battery motor programmation with remote control

Introduction

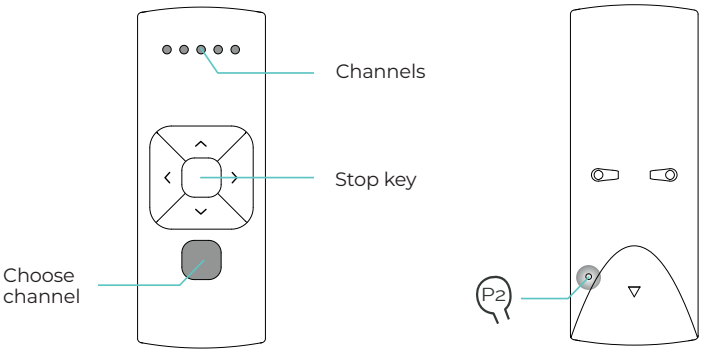



If your motor doesn't respond as described in this manual, please proceed to troubleshooting (pg 3).

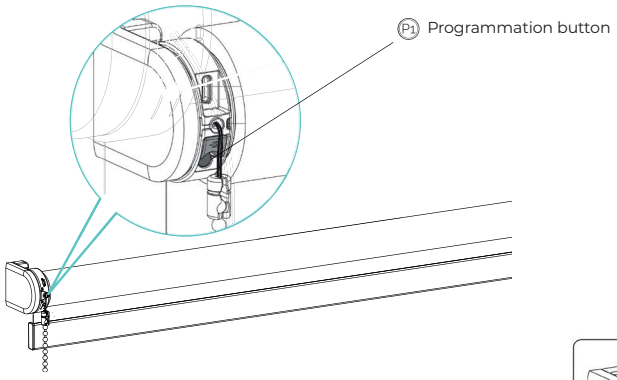



Push the programmation button P1 1x to (de)activate the programmation mode



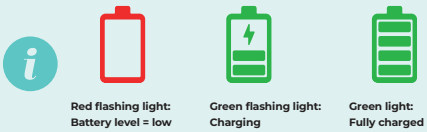



Roller blinds


Pleated blinds


Venetians

Quick start guide


1 Remove motor from transport mode



Led = OK
Led = transport mode

Activate the motor by charging it with a USB-C cable.


Alternative methode (remove motor from transport mode)

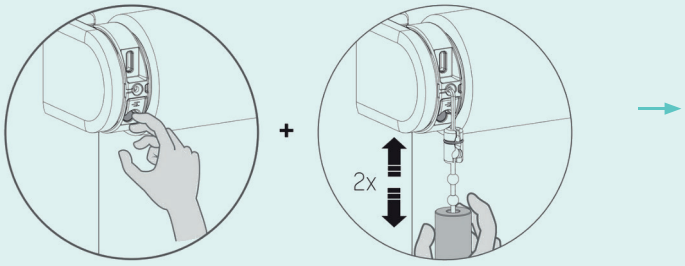

P1 Press and hold


Pull the traction 2x

2 Pair the first remote

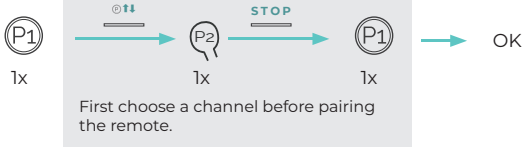

Programmation mode


Push the programmation button P1
1x to (de)activate the programmation mode



Optional


1 Adjust upper and lower limit

1.1 Upper limit

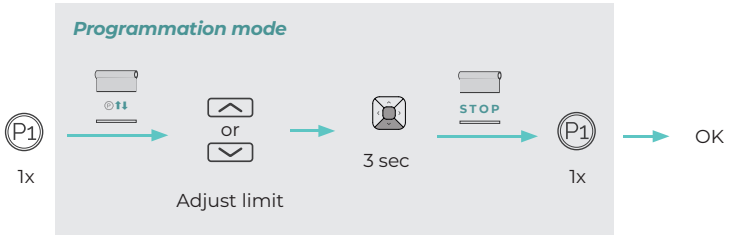


Programmation mode

Push the programmation button P1
1x to (de)activate the programmation mode




For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

1.2 Lower limit

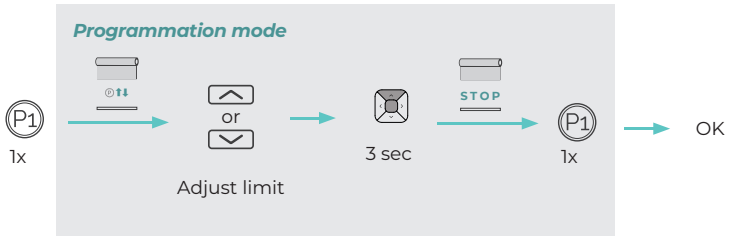

2 Favorite position ★

2.1 Set-up

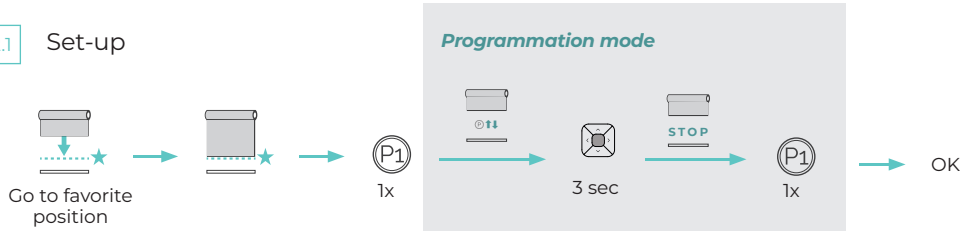


2.2 Go to favorite position



Troubleshooting

1 Factory reset

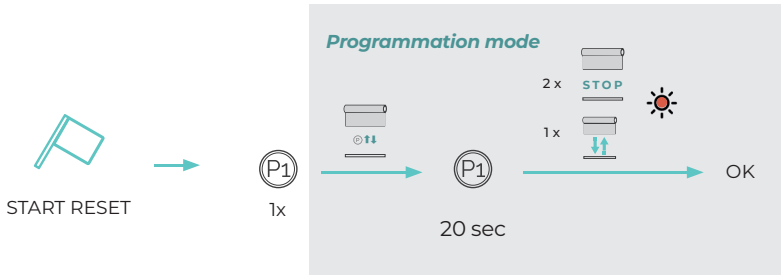


Programmation mode


Push the programmation button P1 1x to (de)activate the programmation mode



2 Pair a remote

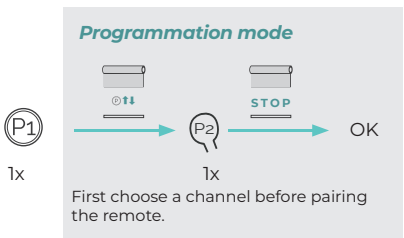


3 Check rotational direction

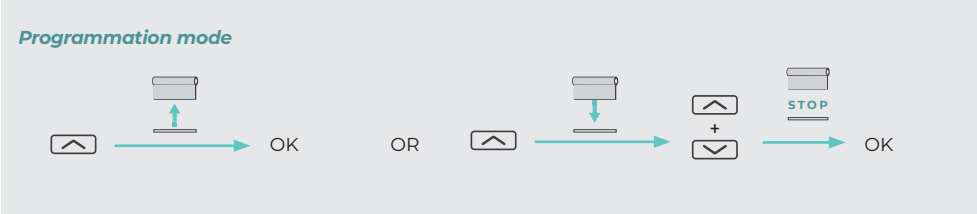

4 Set-up upper and lower limit


4.1 Upper limit

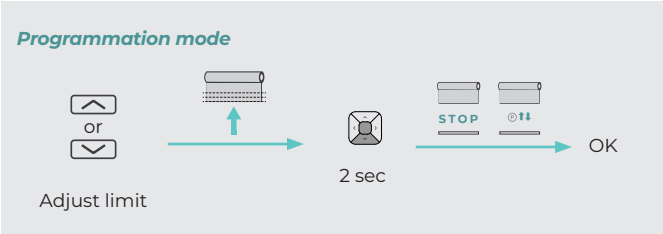

Warning! Risk of damage. Stop the blind in time.

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.

4.2 Lower limit

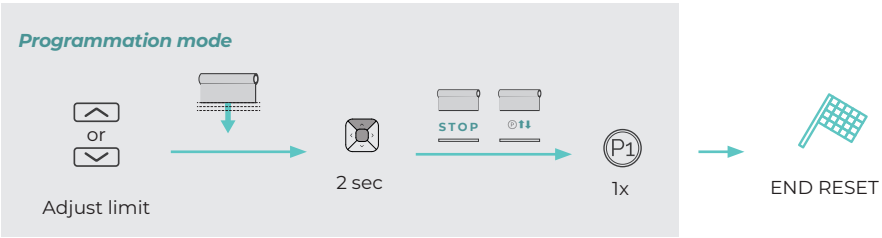

If you have any further questions about the programming of this type of motor, scan the QR code and ask your question.

https://support.motionblinds.com/