
Manual


DIAZ | SUNPROTECTION

Motion Bluetooth mid-motor with external battery/transformer

Introduction

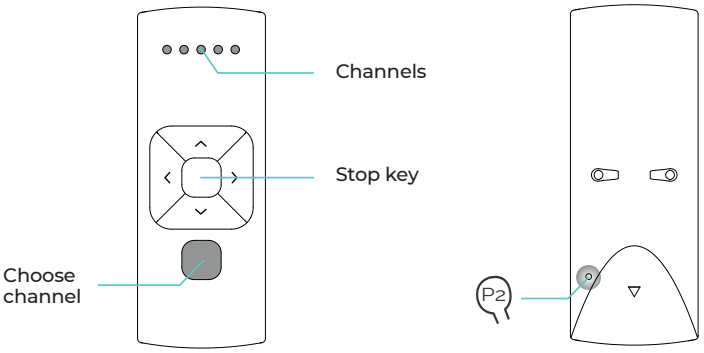



If your motor doesn't respond as described in this manual, please proceed to troubleshooting (pg 3).

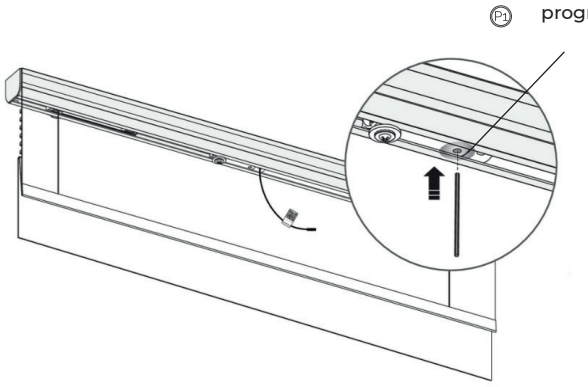


Push the programmation button P1 1x to (de)activate the programmation mode





Pleated blinds


Roman blinds


Venetians


Quick start guide

1 Connect the electricity

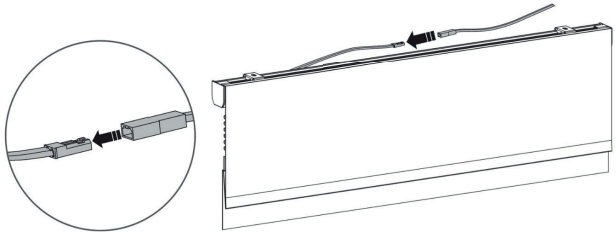

Connect only a 12V transformer DC or rechargeable battery pack.

2 Pair a first remote

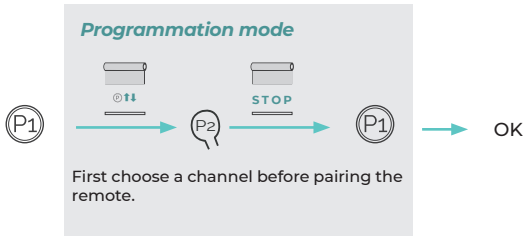

Programmation mode


Push the programmation button (P1) 1x to (de)activate the programmation mode



Optional

1 Adjust upper and lower limit

1.1 Upper limit

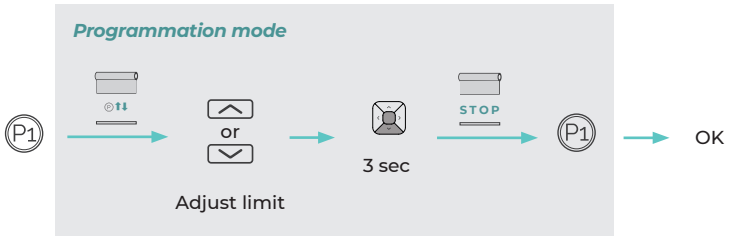


Mode de programmation

Push the (P1) programmation button 1x to (de)activate the programmation mode




For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

1.2 Lower limit

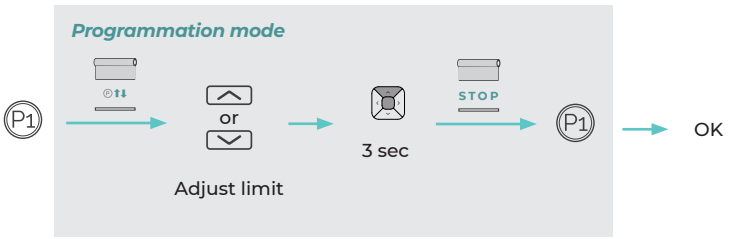

2 Favorite position ★

2.1 Set-up

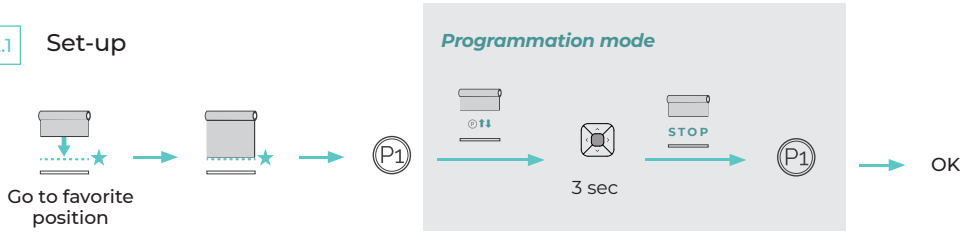


2.2 Go to favorite position



Troubleshooting

1 Factory reset

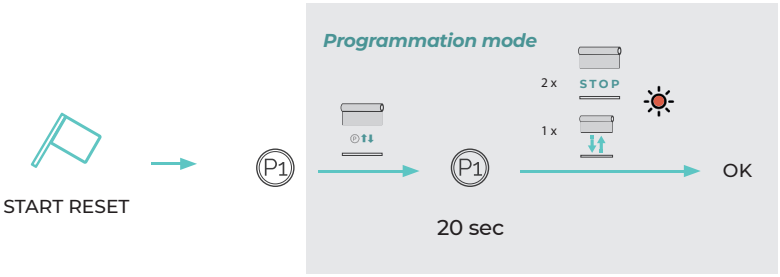


Mode de programmation


Push the P1 programmation button 1x to (de)activate the programmation mode



2 Pair a remote

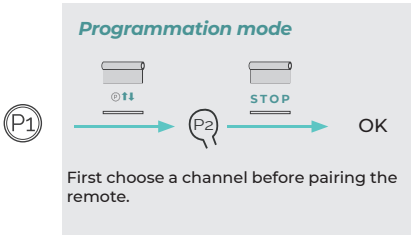


3 Check rotational direction

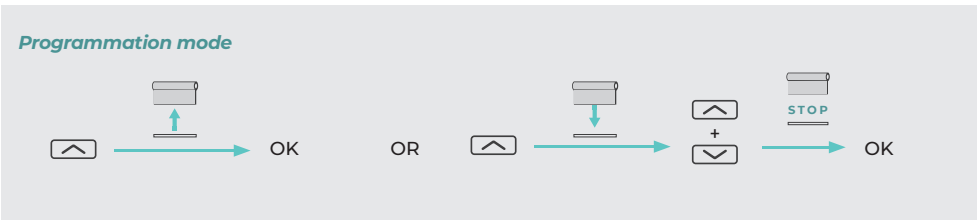

4 Set-up upper and lower limit


4.1 Upper limit

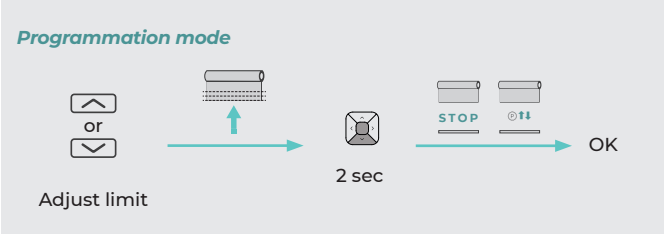

Warning! Risk of damage. Stop the blind in time.

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.

4.2 Lower limit

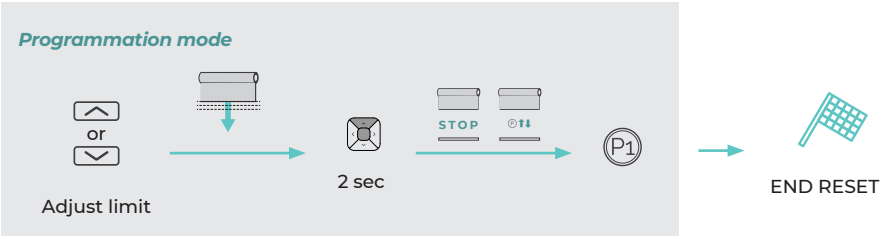

If you have any further questions about the programming of this type of motor, scan the QR code and ask your question.

https://support.motionblinds.com/