
Manual

DIAZ | SUNPROTECTION


Somfy 230V RTS/IO remote controlled motor

Introduction



Up
Stop
Down

Choose channel




Programming button

If your motor does not respond as described in this manual, please proceed to troubleshooting (pg 3).


Quick start guide

1 Connecting the power

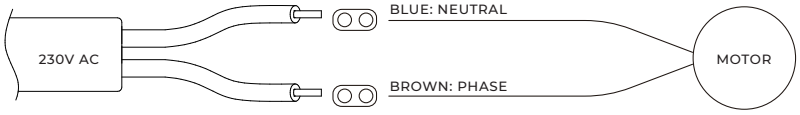

Attention! Do not connect multiple motors simultaneously, but one by one.

2 Connecting the first remote control

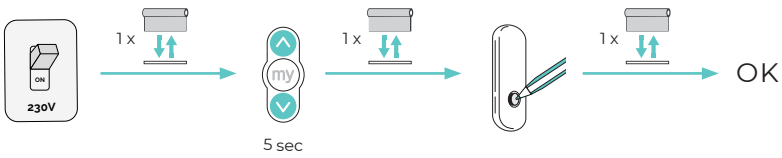


Always choose the right channel before pairing or copying a remote/channel.

Attention! Pair the remote within 10 sec after switching on the power.

Optional


1 Adjust upper and lower limit

1.1 Adjust upper limit

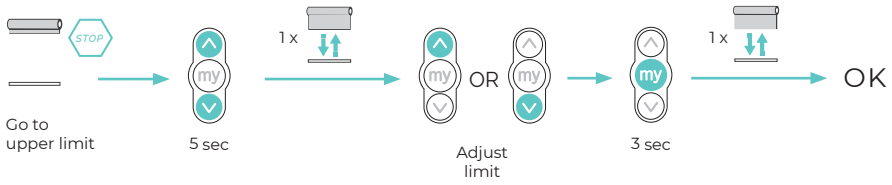



For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

1.2 Adjust lower limit

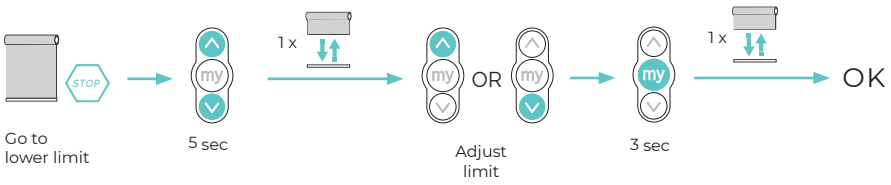


2 Pair/remove additional remote/channel

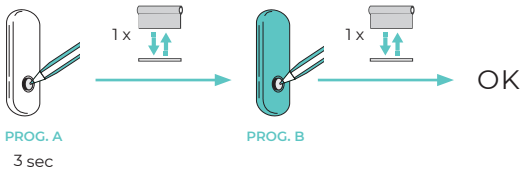

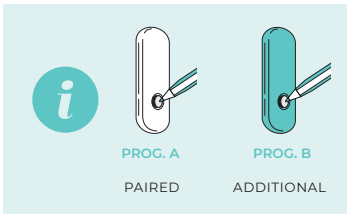

3 Favorite position ★

3.1 Set-up

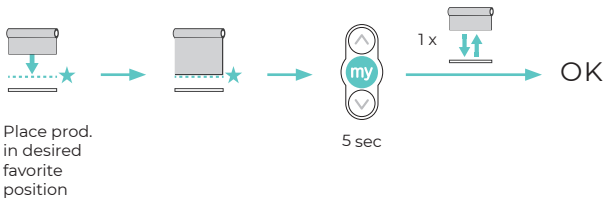

3.2 Go to favorite position




Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

Warning! move the blind away from the upper- and lower limit before the reset.

1 Factory reset

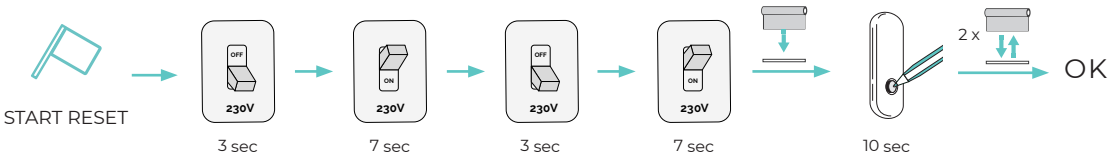

2 Connecting the first remote control

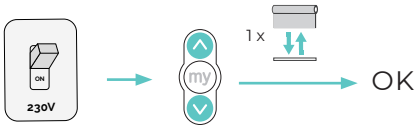


Attention! Pair the remote within 10 sec after switching on the power.

3 Check/adjust rotational direction



Warning!
Risk of damage.
Stop the blind in time.

4 Set-up upper- and lower limit

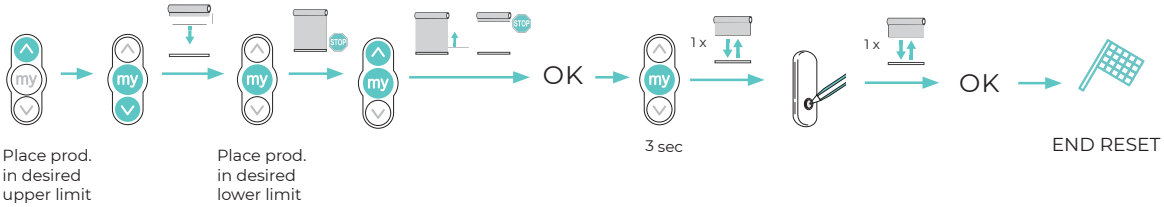

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.