

Manu

DIAZ | SUNPROTECTION


Somfy battery motor with transfo

Introduction






If your motor does noet respond as described in this manual, please proceed to troubleshooting (pg 3).

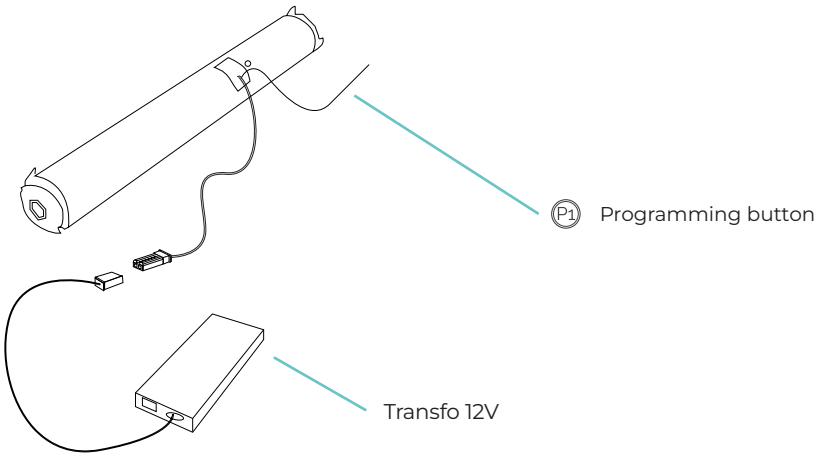

Dimensions transfo:
13 cm x 5 cm
width 1,5 cm


Quick start guide

1 Connecting the power

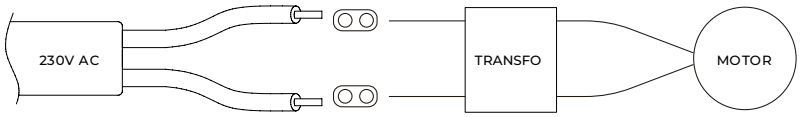

Attention! Do not connect multiple motors simultaneously, but one by one.

2 Pair the first remote

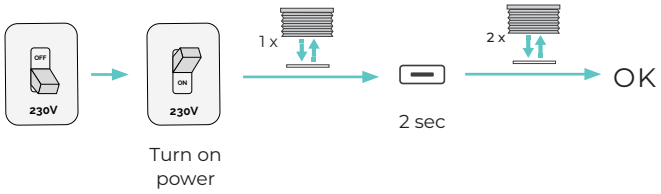

Attention! Pair the remote within 10 sec after turning on the power/operating P1.


Alternative method



Always choose the right channel before pairing or copying a remote/channel.


Optional


1 Adjust upper and lower limit

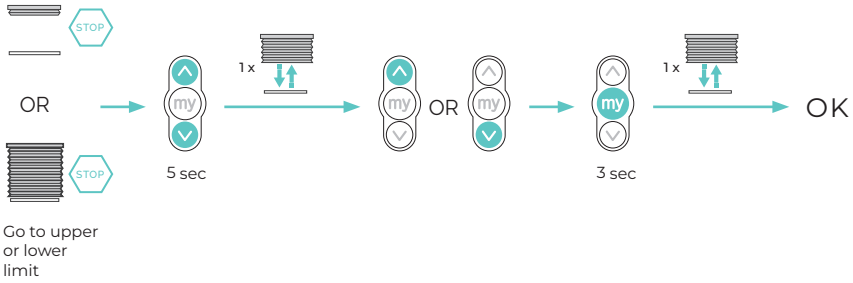


For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

2 Pair/remove additional remote/channel

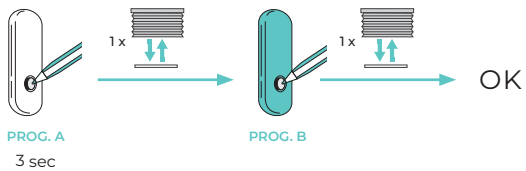

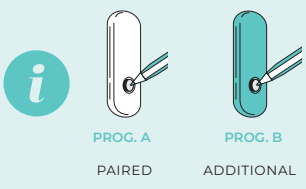


3 Switch between roll and orientation mode.

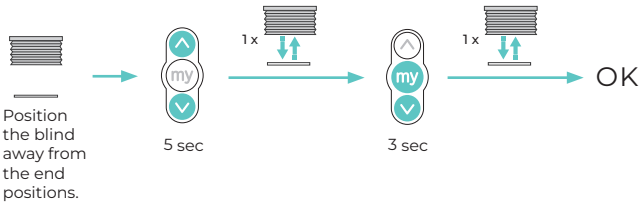


The standard is the orientation mode. This mode is the best option for horizontal blinds.

4 Favorite position ★

4.1 Set-up

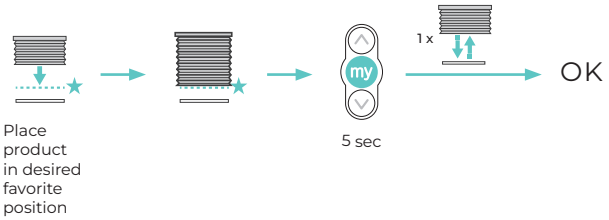

4.2 Go to favorite position




Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

Warning! Move the blind away from the upper- and lower limit before the reset.

1 Factory reset

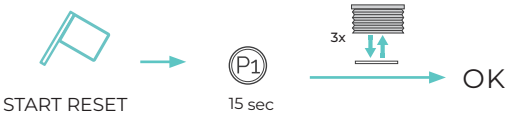

2 Pair the first remote

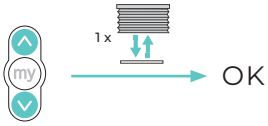


Attention! Pair the remote within 10 sec after operating P1.

3 Check rotational direction



Warning! Risk of damage. Stop the blind in time.

4 Set-up upper- and lower limit

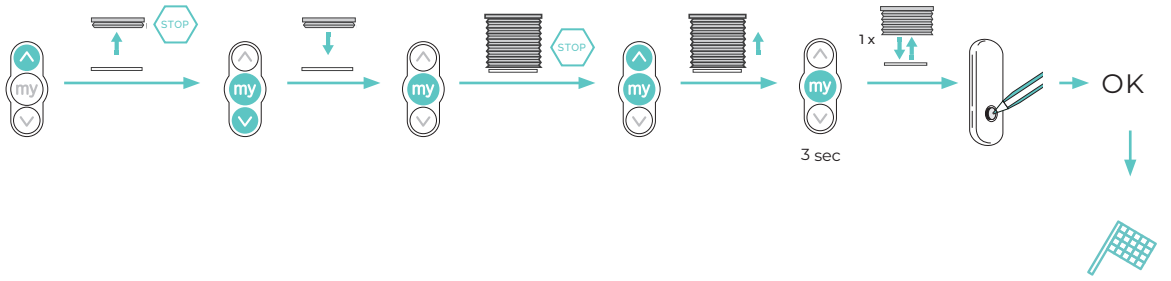

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.