

Manual


DIAZ | SUNPROTECTION

Smart dim-out plus roller blind


Read this manual attentively before installing and using the product. The installation can also be done by non-professionals. Indoor use only.

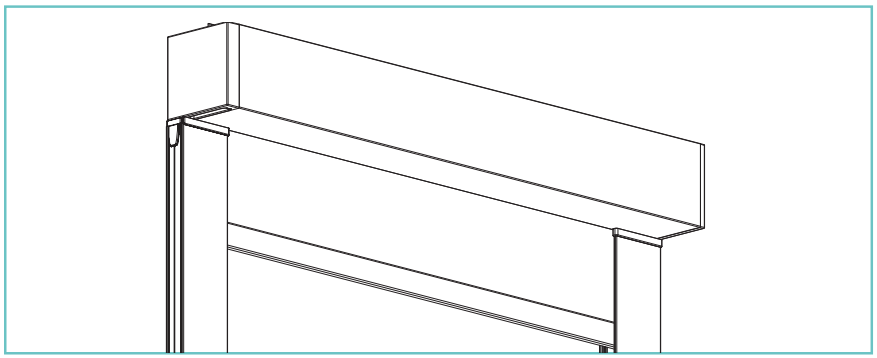

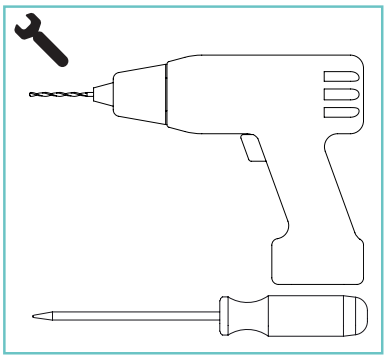

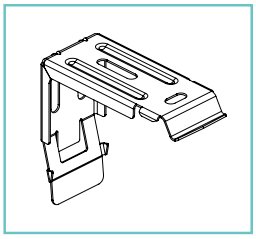





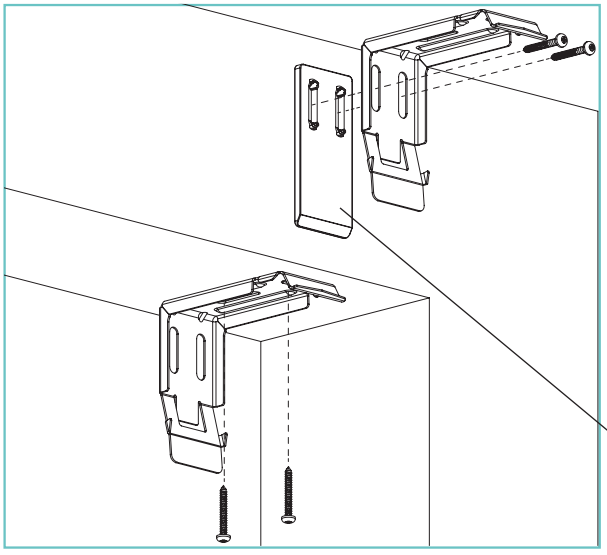

Always ensure that the brackets of the cassette are placed in one vertical line (level) so that the side guides are perfectly parallel. The diagonal distance of the 2 side guides also needs to be identical. (See figure A)


The supplied filler plate should only be placed behind the bracket for wall mounting.

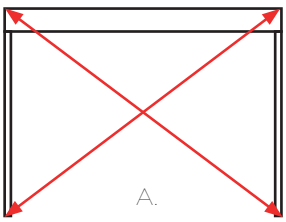

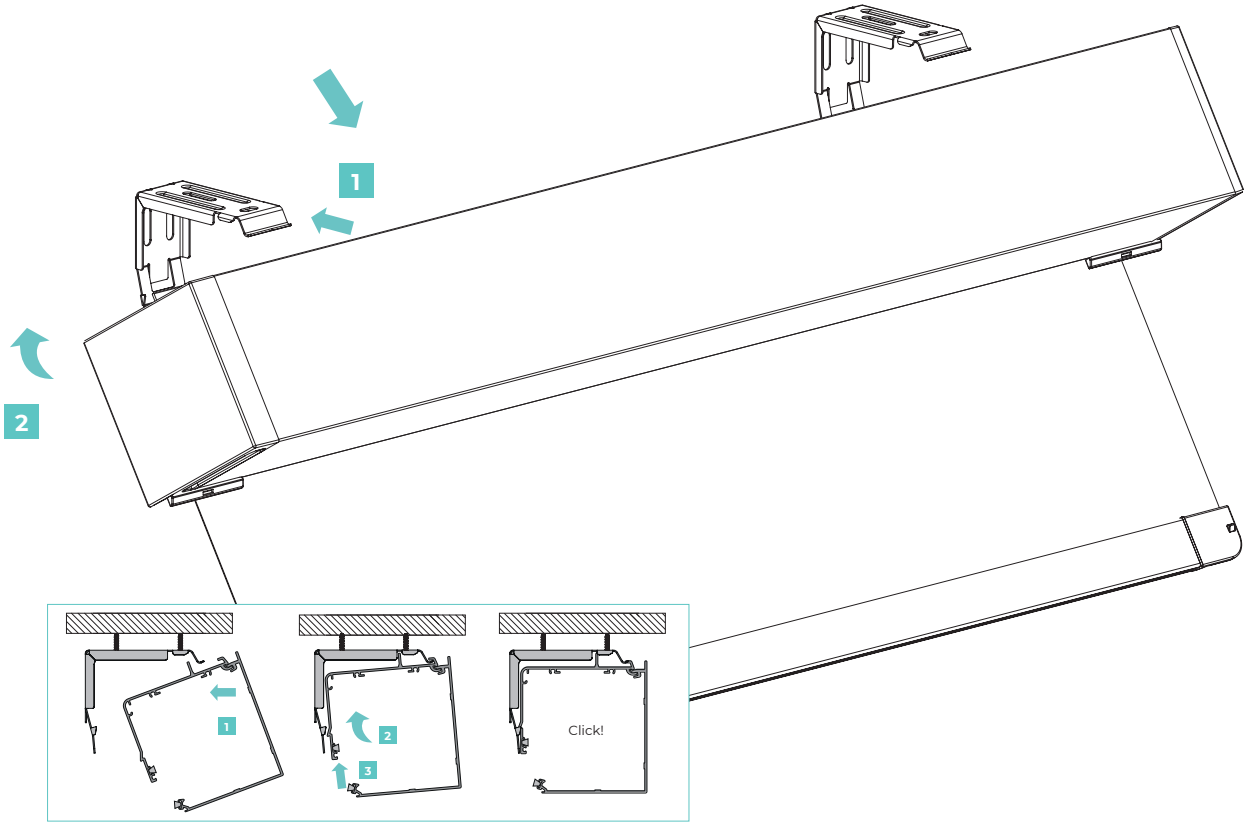


Installation in the window opening


1 Lateral drilling of the side guides.

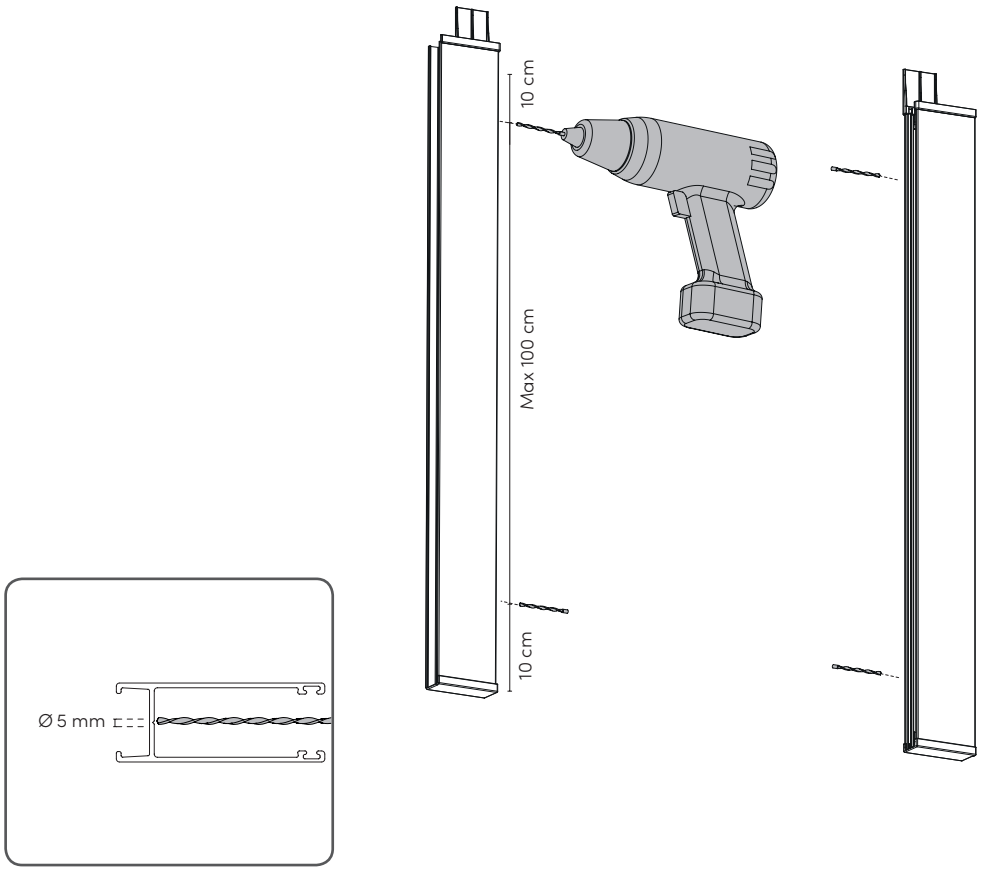


2 Click the side guides onto the cassette.

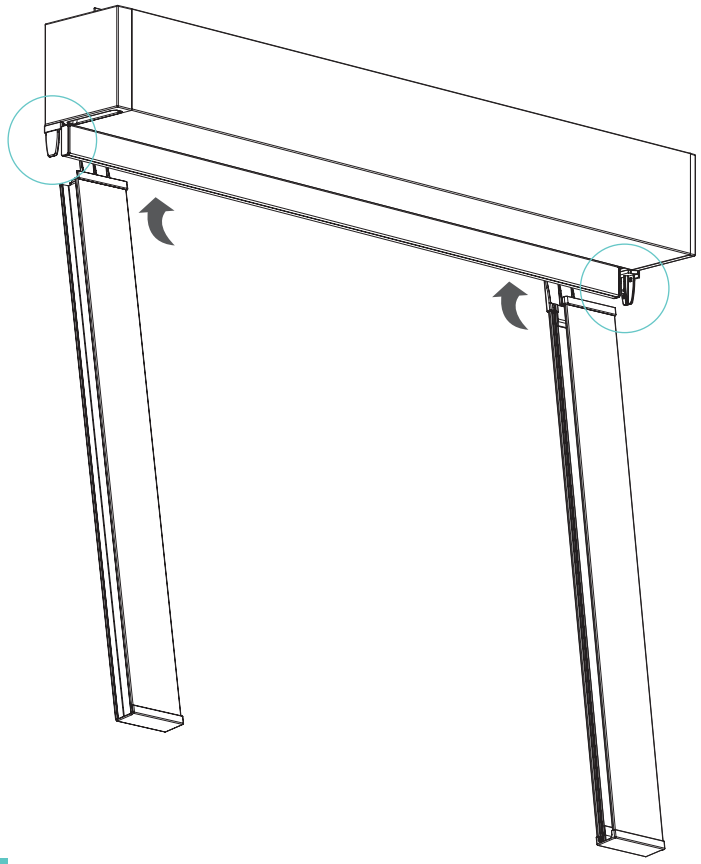

First, click the connectors into the cassette

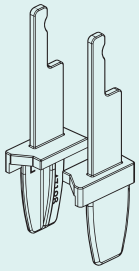


3 Screw the side guides.

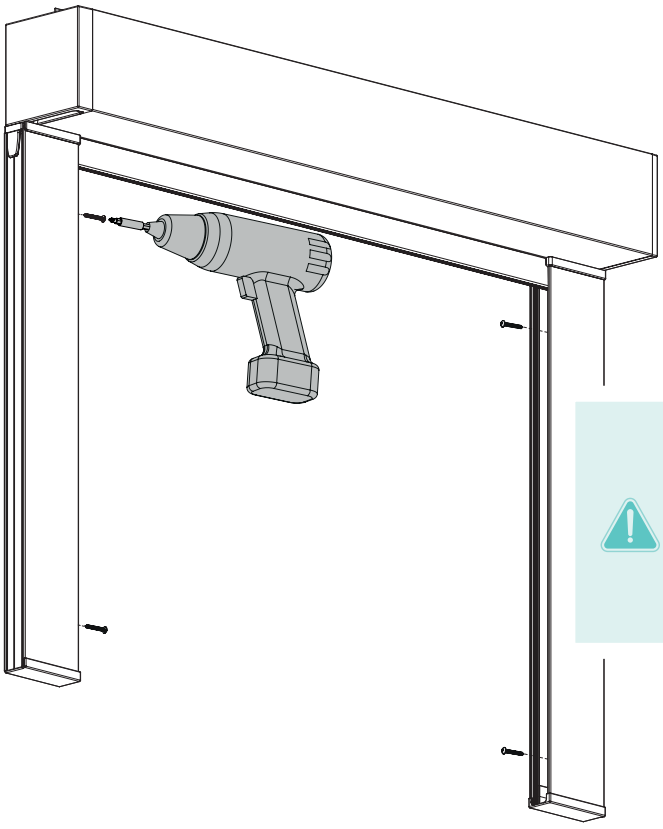


The side guides must always be drilled through. If they are glued, your warranty on the side guides is no longer valid. In addition, when the side guides are glued in place, no technical intervention by Diaz can be requested.

Installation outside the window opening


1 Drill through the L-profiles.

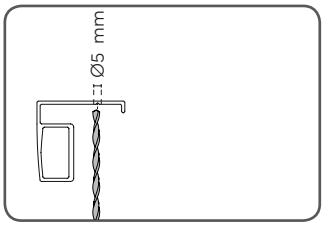


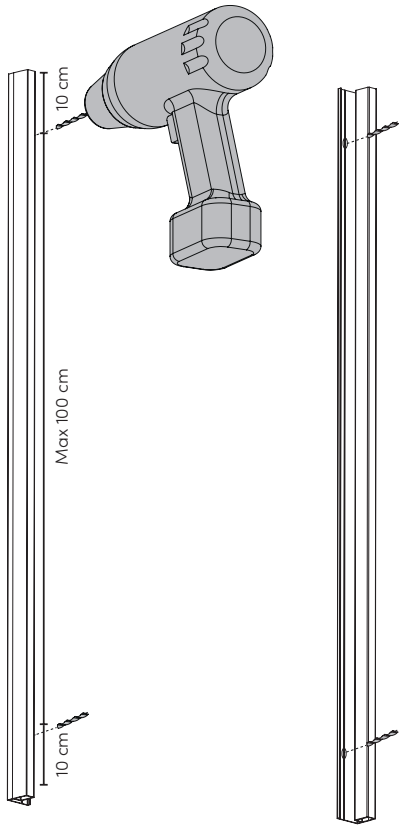


2 Click the L-profiles onto the cassette and screw them on the wall.


First, click the connectors into the cassette

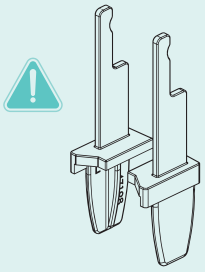

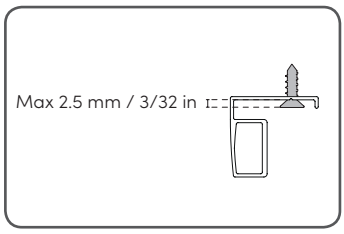


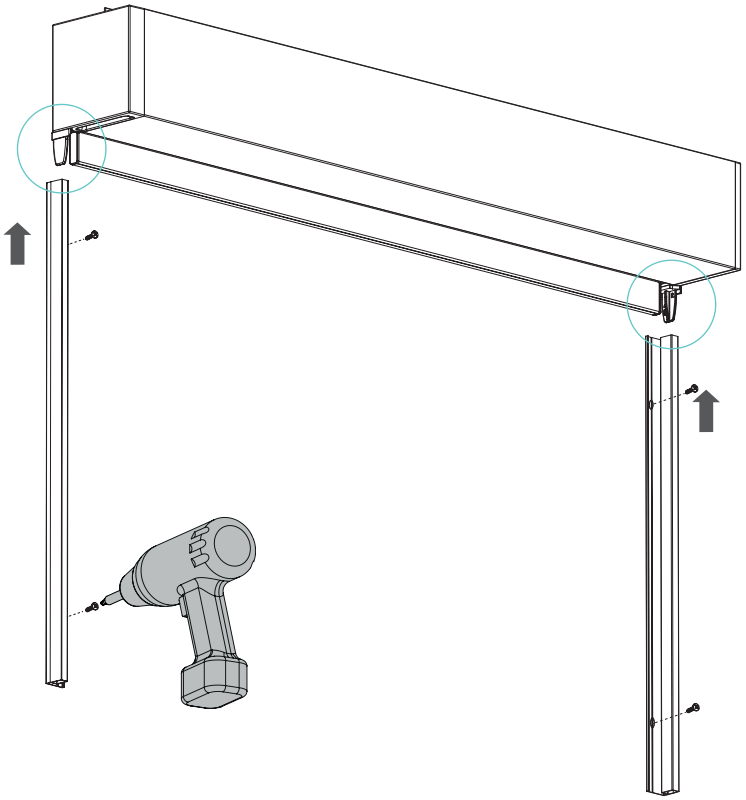


3 Lateral drilling of the side guides.

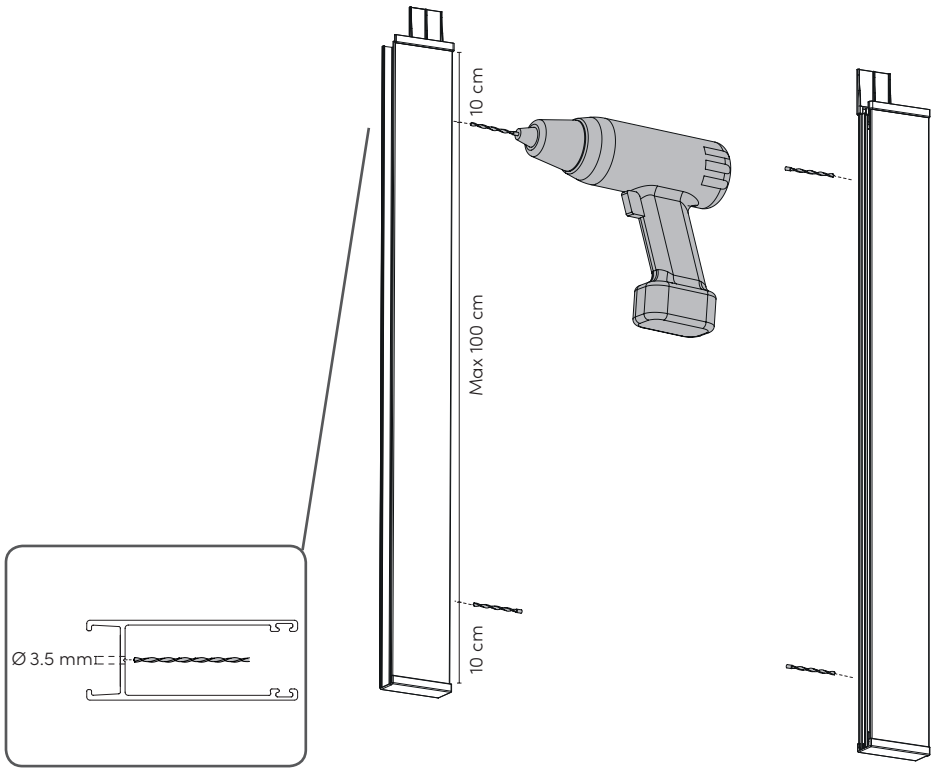


4 Click the side guides onto the L-profiles and cassette.

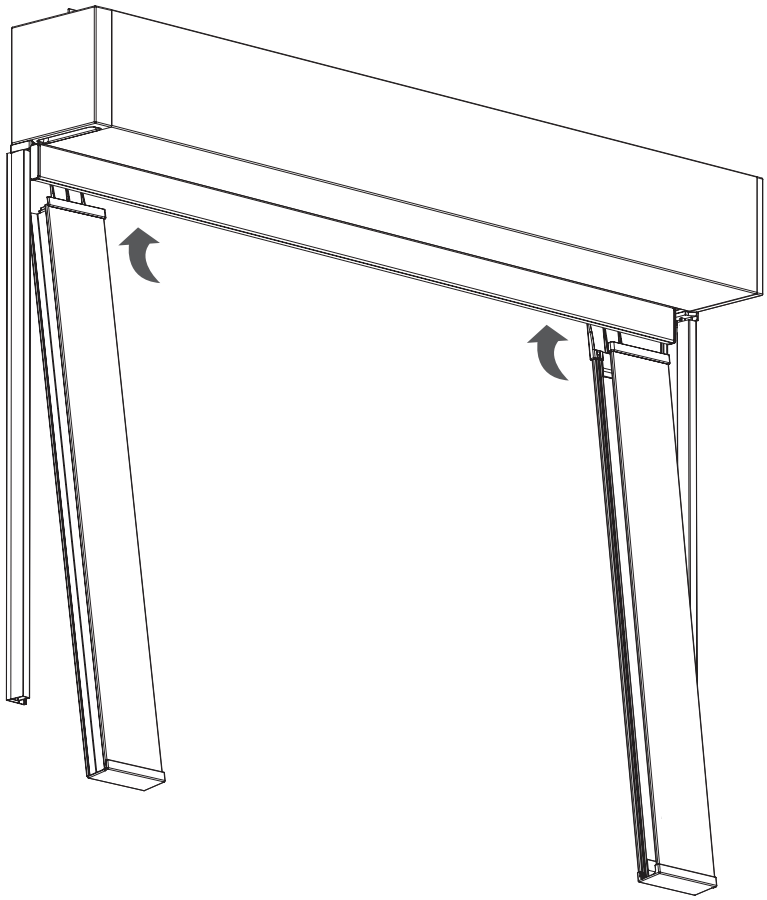

5 Screw the side guides lateral onto the L-profiles.

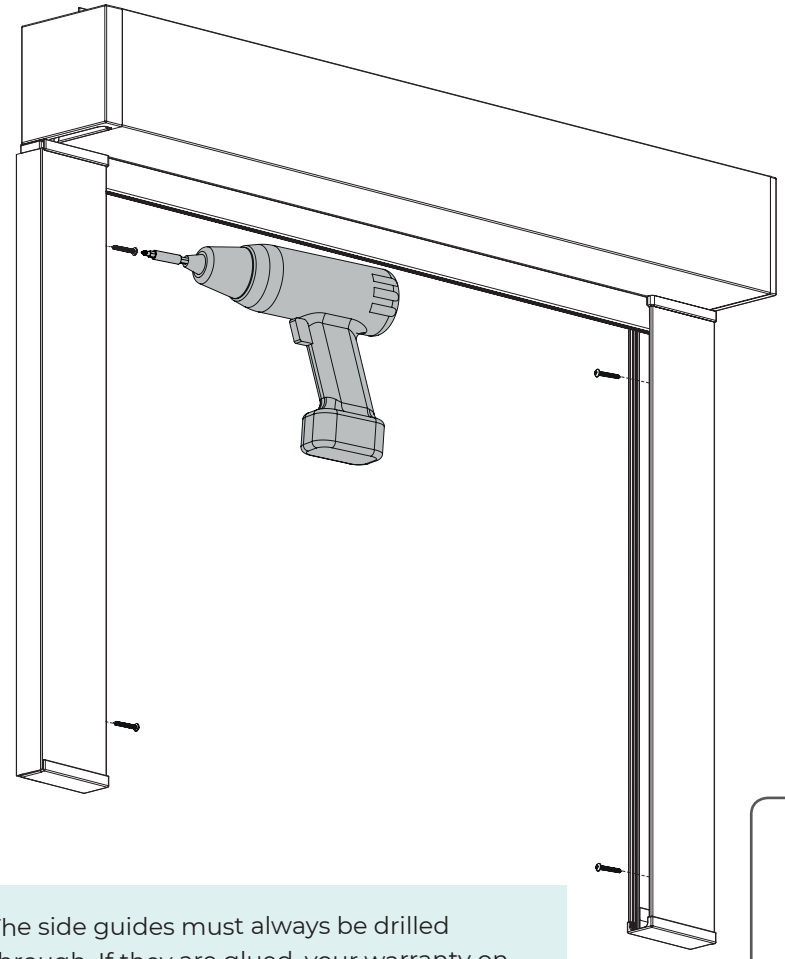

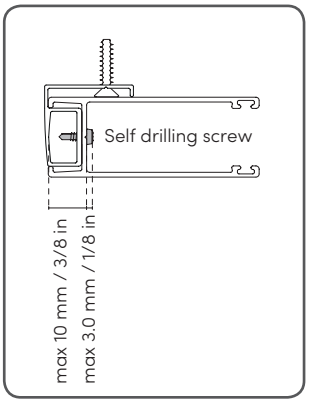

The side guides must always be drilled through. If they are glued, your warranty on the side guides is no longer valid. In addition, when the side guides are glued in place, no technical intervention by Diaz can be requested.


Optional – attach expanding tape for additional blackout effect


To reduce light gaps around the cassette, expanding tape can be attached to the cassette.

Mounting in the window opening

After applying the expanding tape, it will gradually expand. It takes approximately 24 hours for the expanding tape to fully expand. Install the system before the expanding tape has fully expanded.




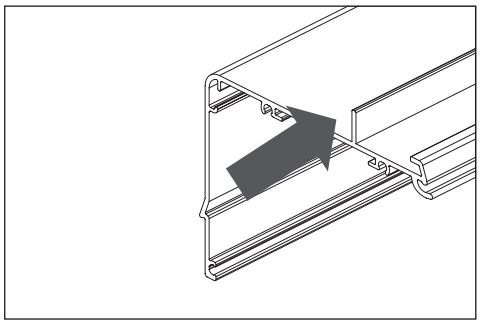


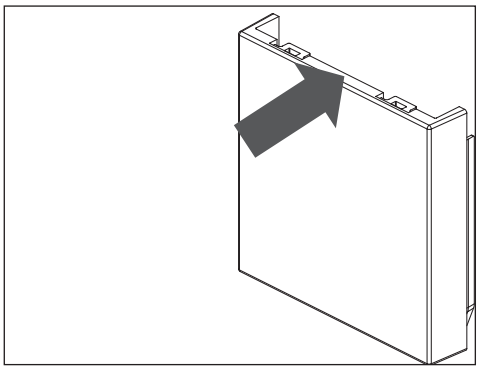


Mounting outside the window opening

After applying the expanding tape, it will gradually expand. It takes approximately 24 hours for the expanding tape to fully expand. Install the system before the expanding tape has fully expanded.

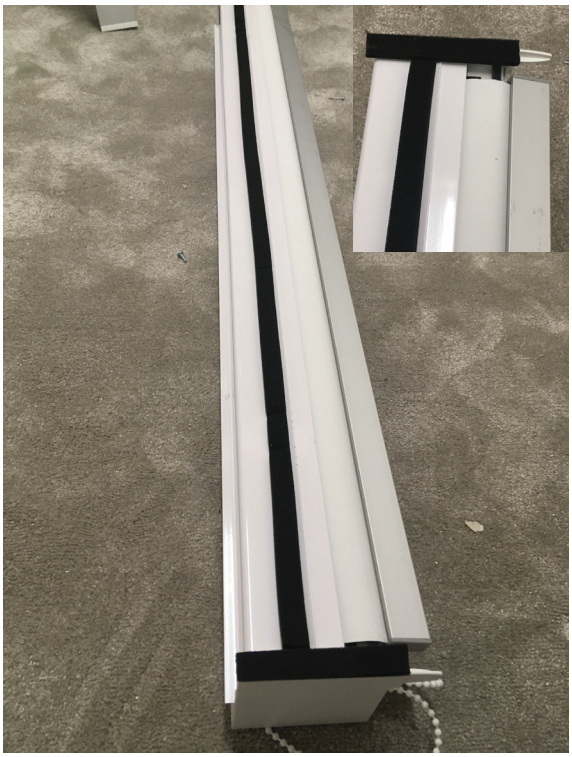

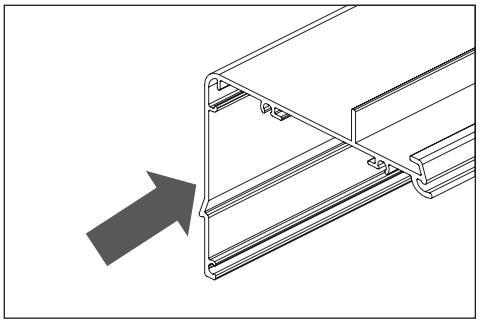

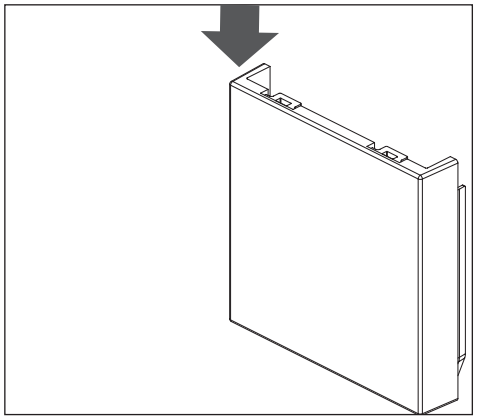

More information: www.diaz.be/childsafety

WARNING! Installation Child Safety!

CHILD SAFE PRODUCT

- Young children can suffocate in the loop of the operation cords, chains, tapes and cords with which you operate your window decoration. They can also wrap the cords around their neck.
- Keep the cords out of reach of young children to avoide strangulation and suffocation.
- Place beds, cribs and other furniture away from the cords of the window decoration.
- Do not tie the cords. Make sure the cords do not get strangled or make a loop.
- Install and use the delivered parts for child safety according to the installation instructions to reduce the risks of strangulation and suffocation.

All our blinds are conform to the European “Child Safety” standers EN13120