
Manual


Vertical blind with 220V motor


DIAZ | SUNPROTECTION

Description of the parts

If your motor does not respond, please proceed to 'Soft reset of the motor' (step 3, p.4).





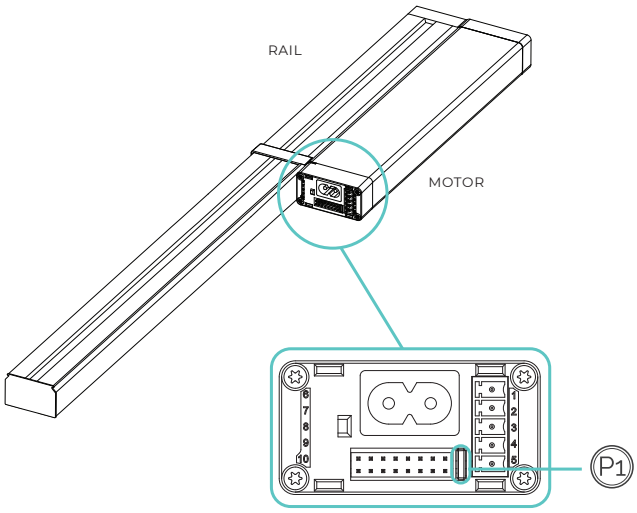




Do not use a switch where you can press 2 buttons simultaneously!


Quick start guide

1 Connecting the power.

A RTS motor

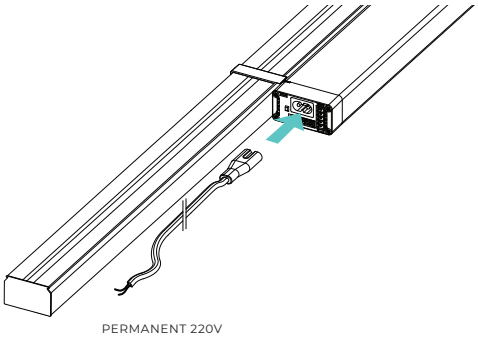


B Potential-free switch control

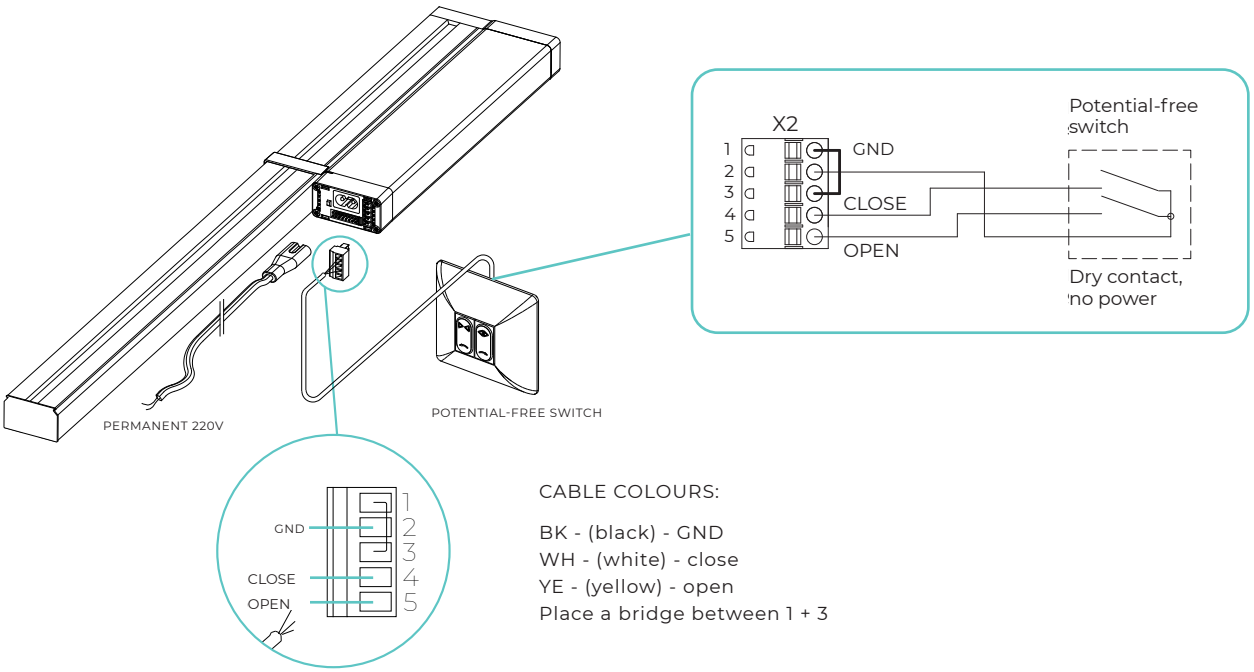

CABLE COLOURS:


BK - (black) - GND
WH - (white) - close
YE - (yellow) - open
Place a bridge between 1 + 3


C Switch control 220V

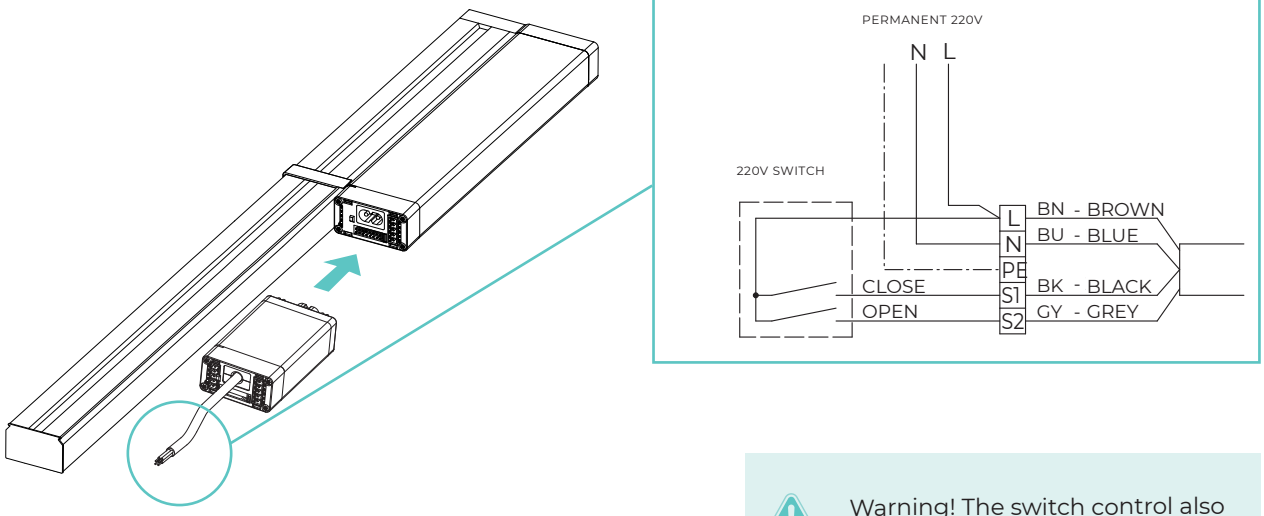

Warning! The switch control also requires permanent power.

2 Connecting RTS remote control.

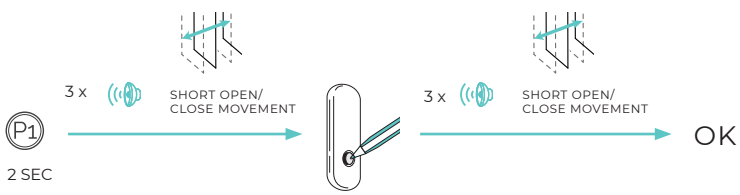




Press P1 of the electronic control circuit.

First choose the right channel before pairing or copying a remote/channel.


Users manual RTS remote control

1 Open and close the slats.

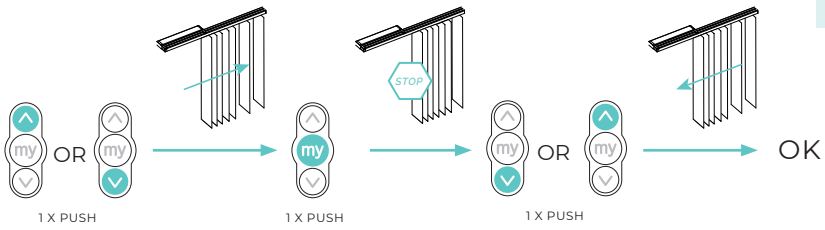


End positions already installed.

2 Orientation of the slats.

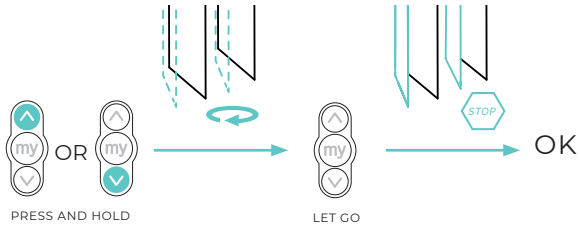


Users manual switch control

1 Open and close the slats.

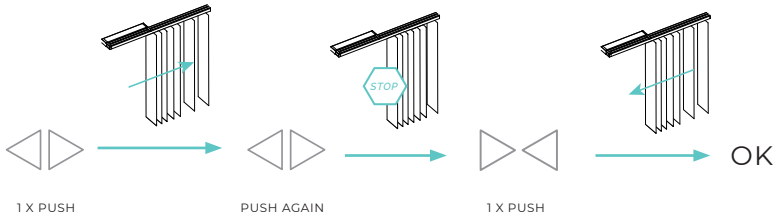



2 Orientation of the slats.

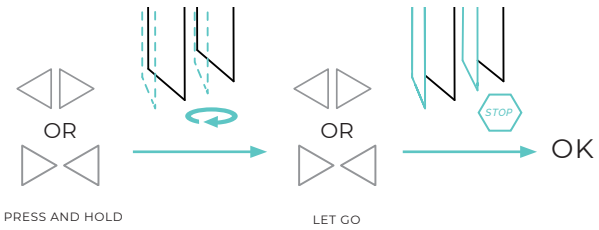


Optional

1 Add/delete additional remote control/channel.

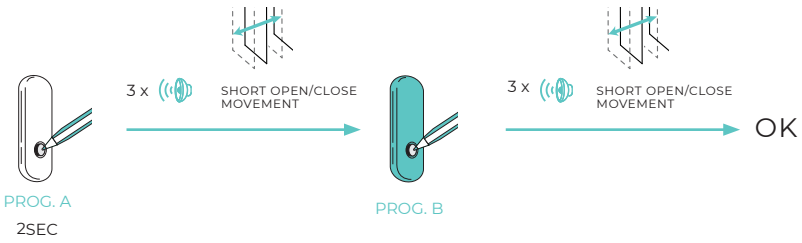


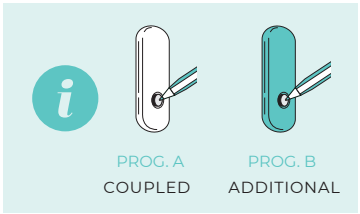


2 Favorite position ★ (only RTS).

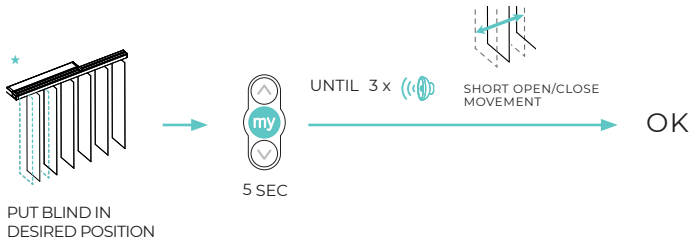

3 Soft reset of the motor.

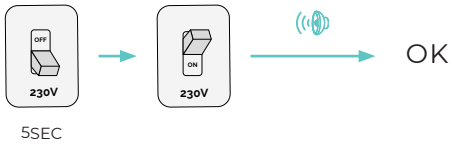

4 Restore factory default (avoid!!!).

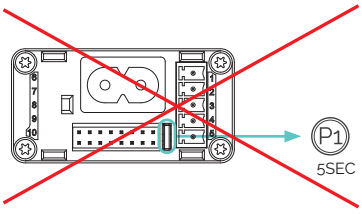

Warning! If you press 'P1' longer than 5 sec. the motor will go back to factory settings. This is irreversible and cannot be solved without a programm-unit.