
MANUAL > Vertical blinds

1 Description of the parts....p. 1
2 Installation of the brackets....p. 1
3 Attaching of the slats....p. 2
4 Child safety....p. 2
5 Users manual....p. 2


1 Description of the parts

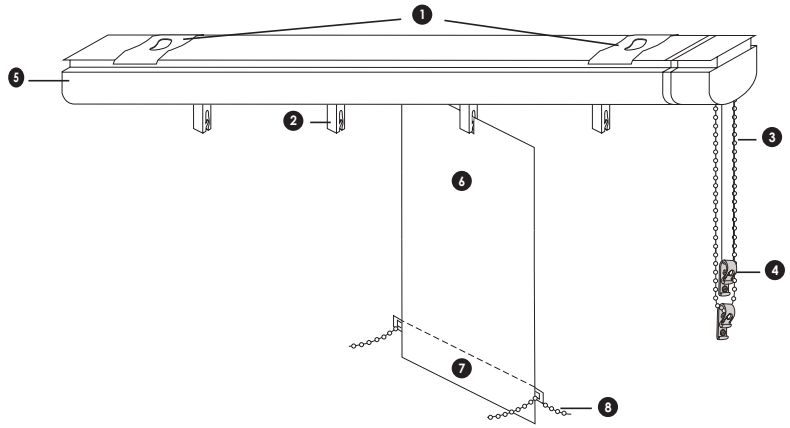


1. Brackets
2. Hook for slats
3. Orientation chain
4. Operation cord (open and close)
5. Rail
6. Slat (textile, pvc or alu)
7. Slat weight (only for textile slats)
8. Chain for slat weight (only for textile slats)

2 Installation of the brackets

First of all draw the position of the brackets onto the ceiling.Make sure that the outer two brackets are positioned at 5cm from the ends of the rail. On the package side, it's best to place a second bracket at 25cm from the end of the rail. Devide the other brackets at equal distance between the outer two brackets.

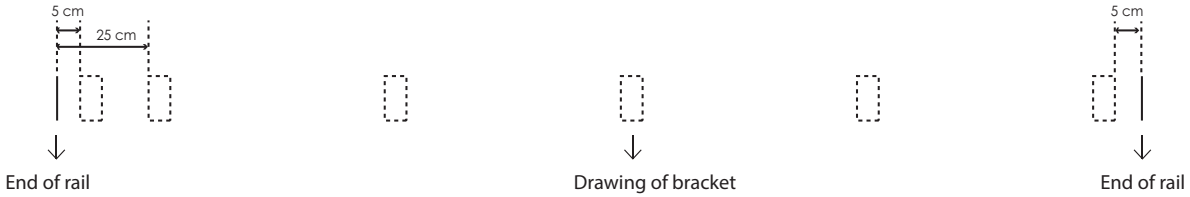

Now we can start by installing the brackets onto the ceiling. Make sure that the brackets are placed in one straight line.

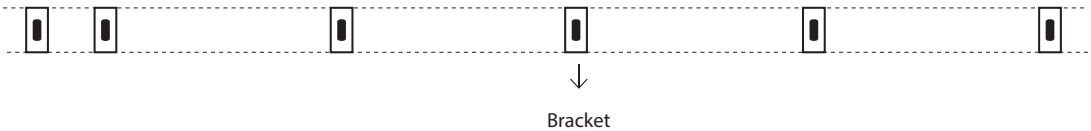

Now that the brackets are installed, you can click the rail into the brackets. First the front and then the back of the rail.



v.24-01

3 Attaching of the slats

Now the rail has been placed, we can start hanging up the slats. With the help of the operation cord we move the hook completely over the rail and place them in open position. So that the groove of the hook is straight in front of you. (figure 1)

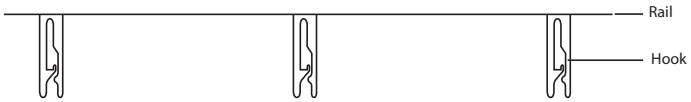


figure 1

We now take the slats and push them into the hooks. (figure 2)



figure 2

If you have textile slats you need to slide in the slat weight in the hem at the bottom of the slat. When this is done, you can slide the chains onto the slat weights. For PVC and ALU slats this isn't necessary. (figure 3)


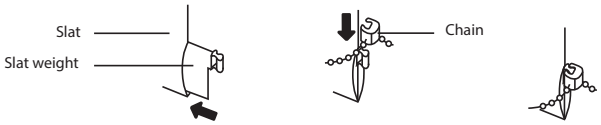


figure 3

4 Child safety

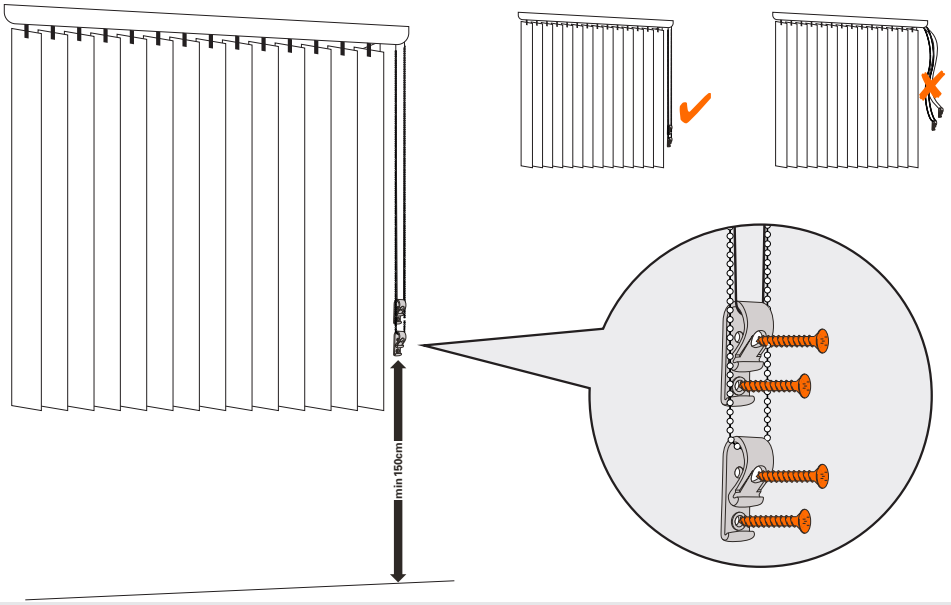

5 Users manual

The orientation chain is used to turn open or close the slats. By pulling this chain, the hooks will turn. By pulling the operation cord the slats will slide to the left or to the right.

Attention! When sliding the slats, make sure they are not in closed position!

v.24-01