Manual


mounting template

General information

In order to avoid any glass damage,
we advise a minimum distance to the pane


transparent fabrics	min. 3 mm ventilation distance
black-out fabrics	min. 5 mm ventilation distance
honeycell® fabrics	min. 20 mm ventilation distance

Special glass may according to instructions from the manufacturer require bigger distance.

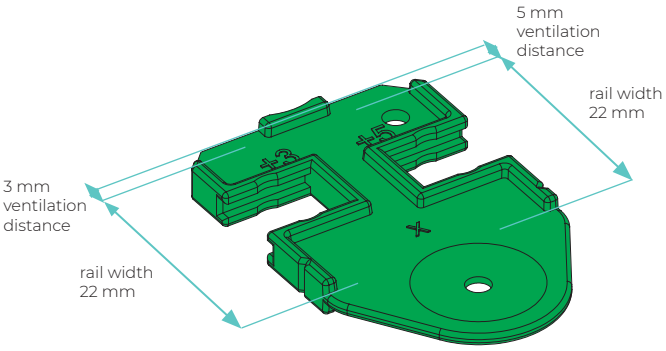


Option 1: Mount fixing plate by use of the mounting template

1 Push the fixing plate into the mounting template.

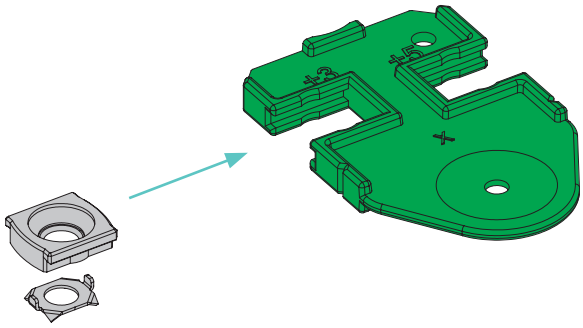

2 Position the mounting template on the glasing bead directly against the pane.

3 Pre-drill and fix the fixing plates.

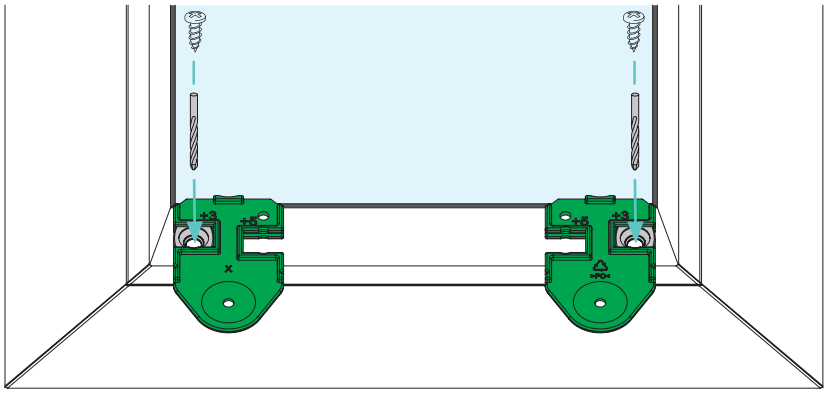

recommendation:
ø 2 mm


recommendation:
DIN 7981 ø 2,9 x 9,5

4 Pull the mounting template from the fixing plate.

5 Fix the tension feet.


Option 2: Mount fixing plate individually

1 Position the mounting template on the glazing bead and drill the mounting hole.

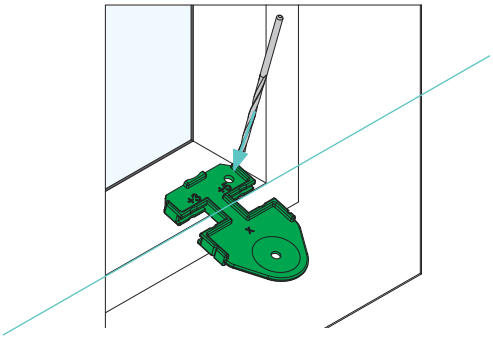

recommendation:
ø 2 mm

2 Screw on the fixing plate.

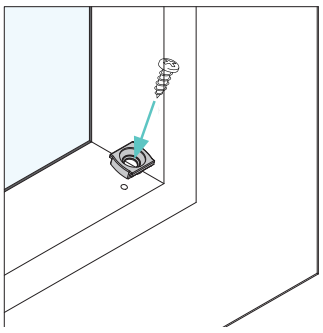

recommendation:
DIN 7981 ø 2,9 x 9,5

3 Fix the tension feet.