
Manual


Diaz B.I. 230V motor

DIAZ | SUNPROTECTION


Scan code for video manual

Introduction

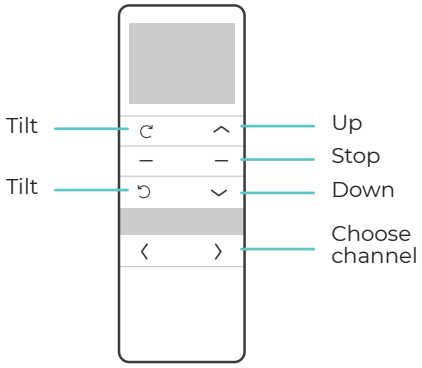

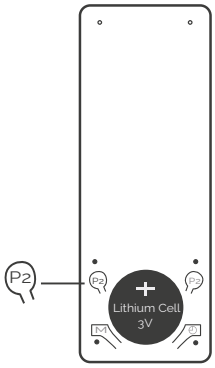

If your motor does not respond as described in this manual, please proceed to troubleshooting (pg 3).

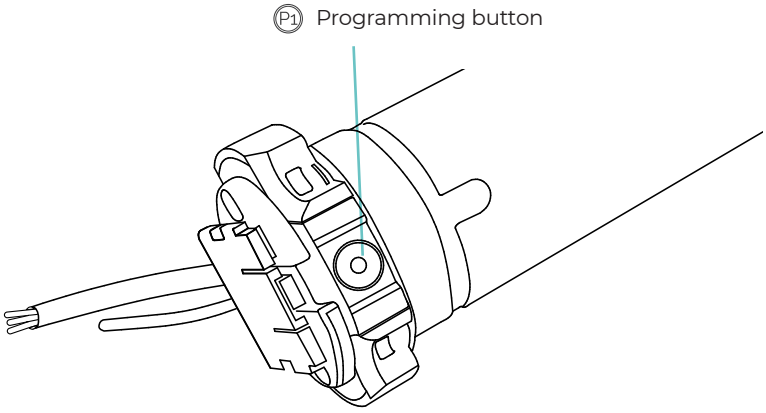

Quick start guide

1 Connecting the power




Attention! Do not connect multiple motors simultaneously, but one by one.

2 Pair the first remote



Attention! Pair the remote within 10 sec after turning on the power/operating P1.

Alternative method

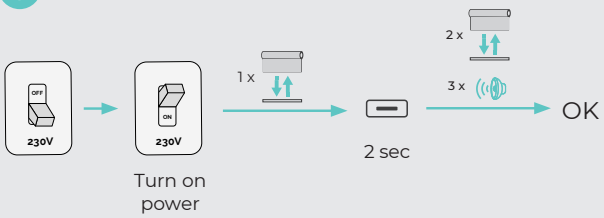


Always choose the right channel before pairing or copying a remote/channel.

Optional


1 Adjust upper- and lower limit

1.1 Upper limit

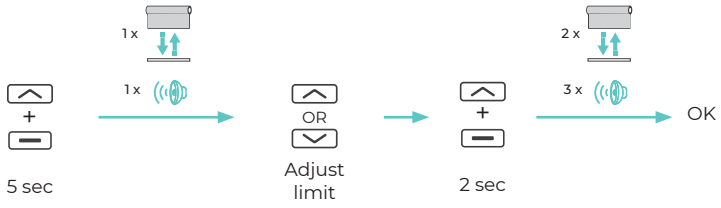



For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

1.2 Lower limit

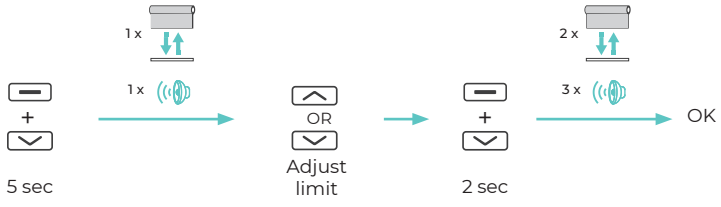


2 Pair/remove additional remote/channel

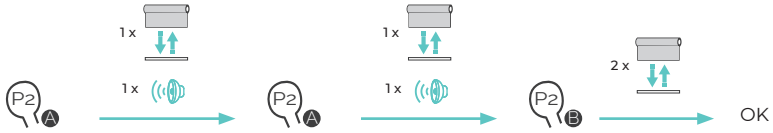

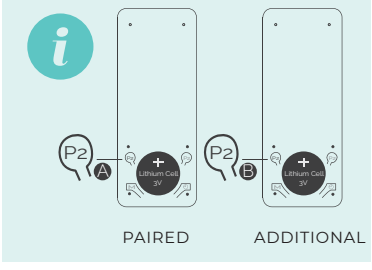


3 Activate/deactivate step by step mode

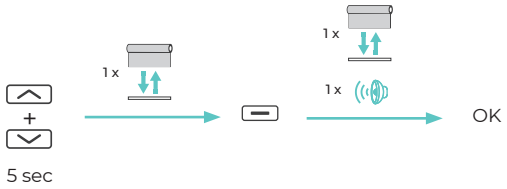

Step by step mode allows you to perfectly tilt venetian blinds with precision.

4 Favorite position ★

4.1 Set-up

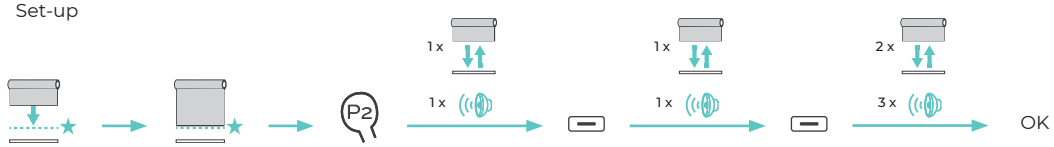


4.2 Go to favorite position



Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

1 Factory reset

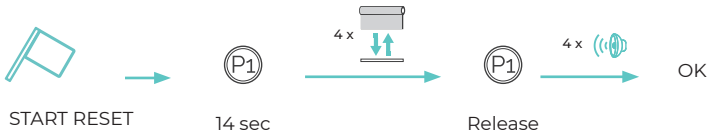


Warning! move the blind away from the upper- and lower limit before the reset.

2 Pair the first remote.

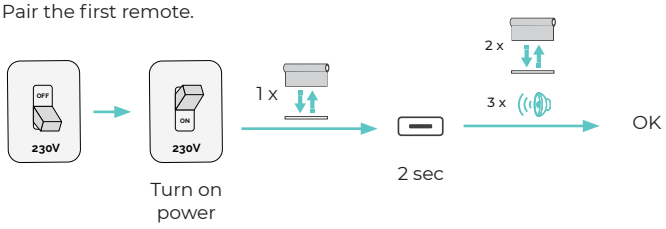

Attention! Pair the remote within 10 sec after turning on the power/operating P1.

Alternative method

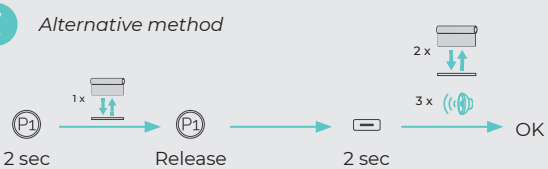

Always choose the right channel before pairing or copying a remote/channel.

To delete a connected channel, repeat the steps above.

3 Check rotational direction




Alternative method



4 Set-up upper- and lower limit

4.1 Upper limit

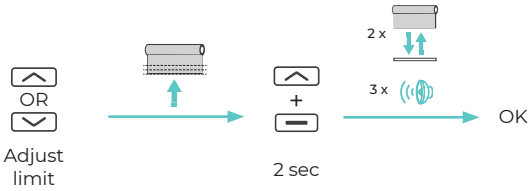

Warning!
Risk of damage.
Stop the blind
in time.

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.

4.2 Lower limit

