
Manual

DIAZ | SUNPROTECTION

Diaz B.I. mid-motor with transformer

Scan code for video manual

Introduction

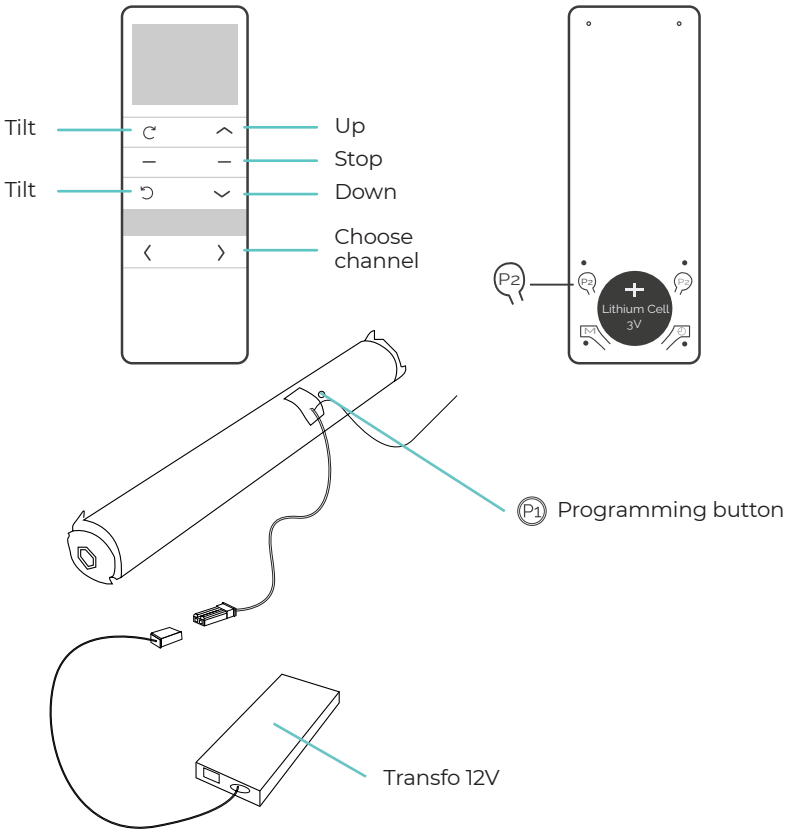


If your motor does not respond as described in this manual, please proceed to troubleshooting (pg 3).

Dimensions transfo:
13 cm x 5 cm
thickness 1,5 cm


Quick start guide

1 Connecting the power



Attention! Do not connect multiple motors simultaneously, but one by one.

2 Pair the first remote

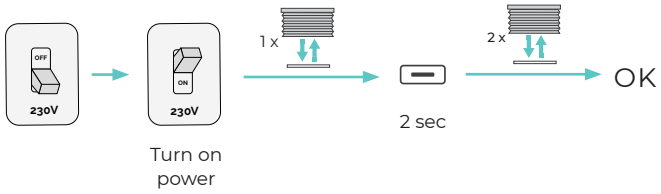

> Attention! Pair the remote within 10 sec after turning on the power/operating P1.

Alternative method




> Always choose the right channel before pairing or copying a remote/channel.

To delete a connected channel, repeat the steps above.

Optional


1 Set-up upper- and lower limit

1.1 Upper limit

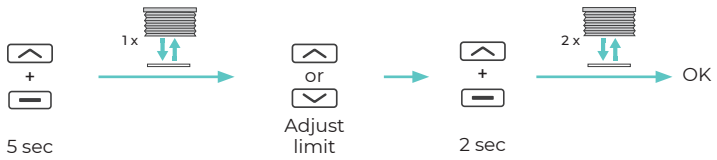



For the venetian blinds in alu and wood we always leave a gap of +/- 1 cm between the first slat and the headrail. If the cords are under tension this will cause them to wear and break more rapidly. Therefore we advise you not to change the upper position!

1.2 Under limit

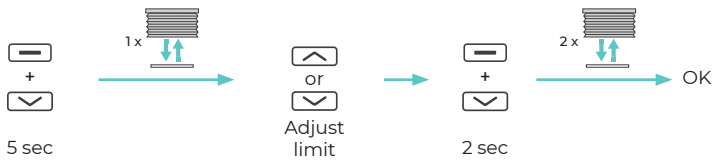


2 Pair/remove additional remote/channel






3 Activate/deactivate step by step mode

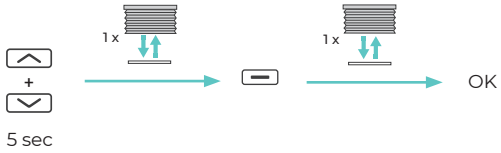


Step by step mode allows you to perfectly tilt your products with precision.

4 Favorite position ★

4.1 Set-up




4.2 Go to favorite position



Troubleshooting


If you opt to do a factory reset of the motor, you need to follow all these steps.

1 Factory reset

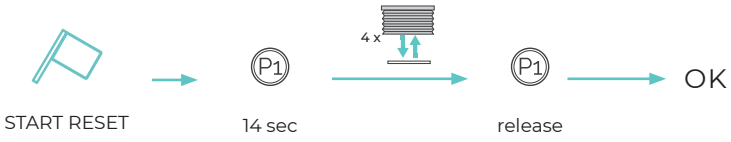

Warning! move the blind away from the upper- and lower limit before the reset.

2 Pair the first remote.

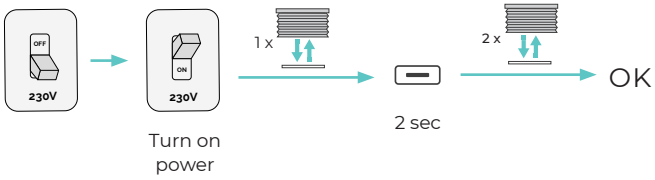

Attention! Pair the remote withing 10 sec after turning on the power/ operation P1.

Alternative method



Always choose the right channel before pairing or copying a remote/channel.

3 Check rotational direction




Alternative method



4 Set-up upper- and lower limit

4.1 Upper limit

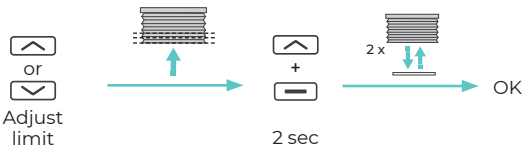

Warning!
Risk of damage. Stop the blind in time.

Always leave a gap of +/- 1 cm between the first slat and the headrail for venetian blinds in alu and wood. The cords must certainly not be under tension, as this can cause rapid wear and tear resulting in cord breakage.

4.2 Lower limit

